



premium multi-ply engineered wood flooring.



INTRODUCING

Engineered Wood Fooring from GOLINKFLOOR® and GOLINKWOOD™(GOLINK™). All our engineered wood species are imported from Europe, Russia, America, Burma and Indonesia, then manufactured in China.

We are the ideal flooring solution for luxurious living, environmental protection, classic and traditional sophistication, and modern sensibility that speaks to the beauty, and art of premium flooring.





Content

Russian oak collection.

Delicate and not easily deformed.

028

Introuduction

About us and wood origins.

03

Facility.State of the art manufacturing facility.

Our mill.

Mill production and customer profile.

Create your floor puzzle.

Custom patterns can be achieved. so imaginative.

Meet our flooring super item.

View our oak engineered wood flooring.

European oak collection.

Made with uncompromising quality.

Good quality and low price.

American black walnut collection.

Create a stunning look.

Burmese teak collection.
Golden colour, stability & durability.

Oak artistic collection.

Long service life. Increases the value of home.

Engineered flooring showroom.

European oak. Russian Oak. American walnut. ASH. Burmese Teak.

Technical Specifications.
Planks, Chevron, Herringbon Structure, 078 Dimensions and Grades.

Surface Treatments.

Brush, Handcraft, Smoke & Fume, Lacquer.





State-of-the-art manufacturing facility.

Experience our state-of-the-art manufacturing unit in our headquarter of Deqing, China

Since 1996.











98%

Quantity For Export



28+

Countries



1,800,000 m²

Annual Output



12

Tests Before Export









We are committed to provide our clients with the finest-quality engineered wood flooring from well certified, responsibly managed forests.

Our flooring products are 98% for export, with average annual turnout of 1,800,000 m².

We export worldwide across 28 different countries with clients from large residential and commercial projects, wholesalers and retailers. We have earned great praise of overseas market resulting from high quality, responsible price and accurate shipment.




Create Your Hooring Puzzle


We offer our floors and planks in a variety of patterns.

Traditional features single width and variable length boards.


Herringbone and Chevron, which include tongue and groove sides and double grooved ends, are delivered with custom splines for ease of installation. 2G & 5G Joint System can also be achieved.


Our CHEVRON flooring in strip floor size to plank size. customized species, colors available. Angle degree can be 45°, 60° or else.






CHEVRON 45° CHEVRON 60°

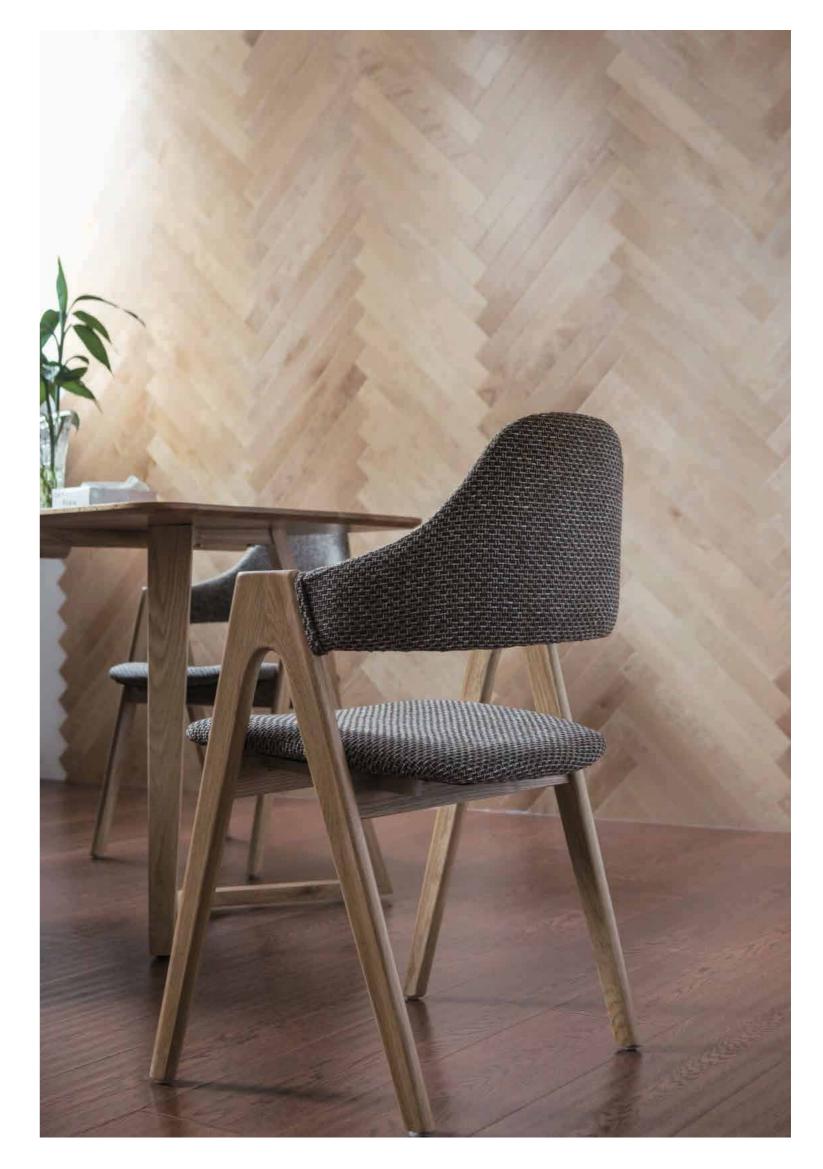

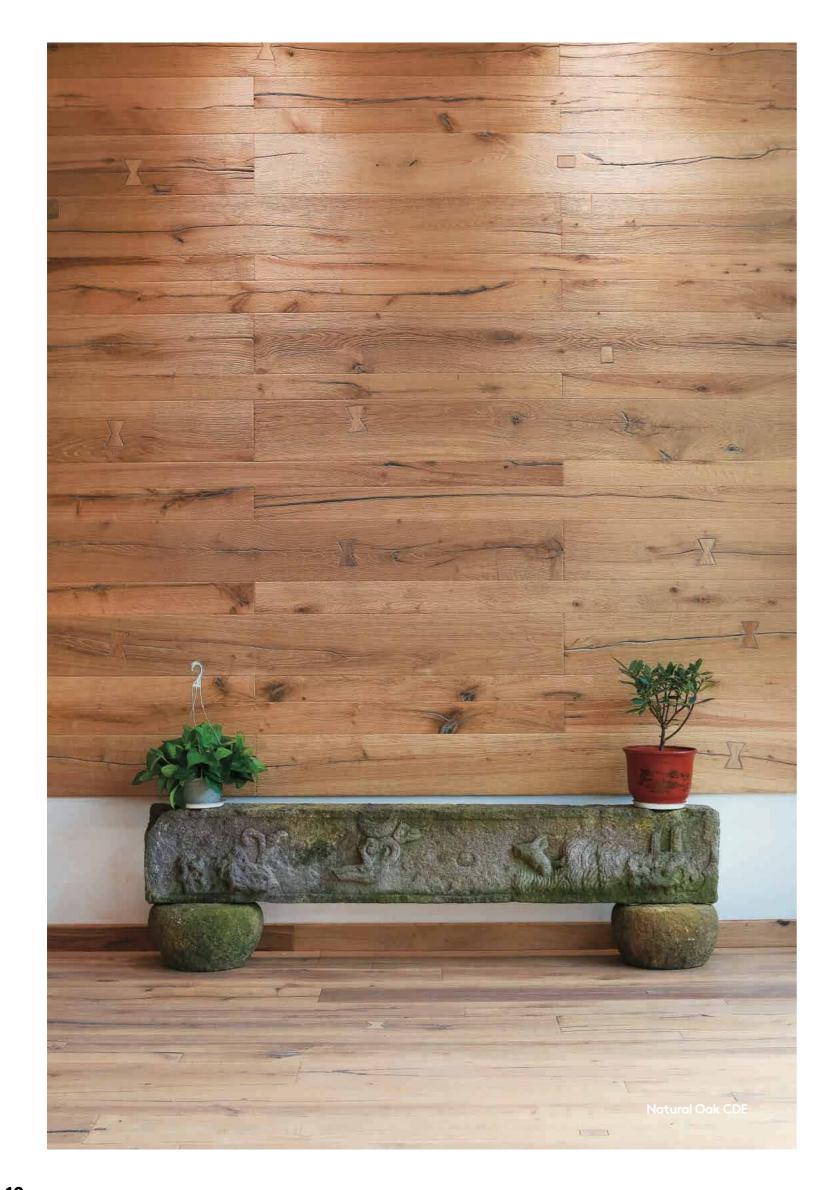





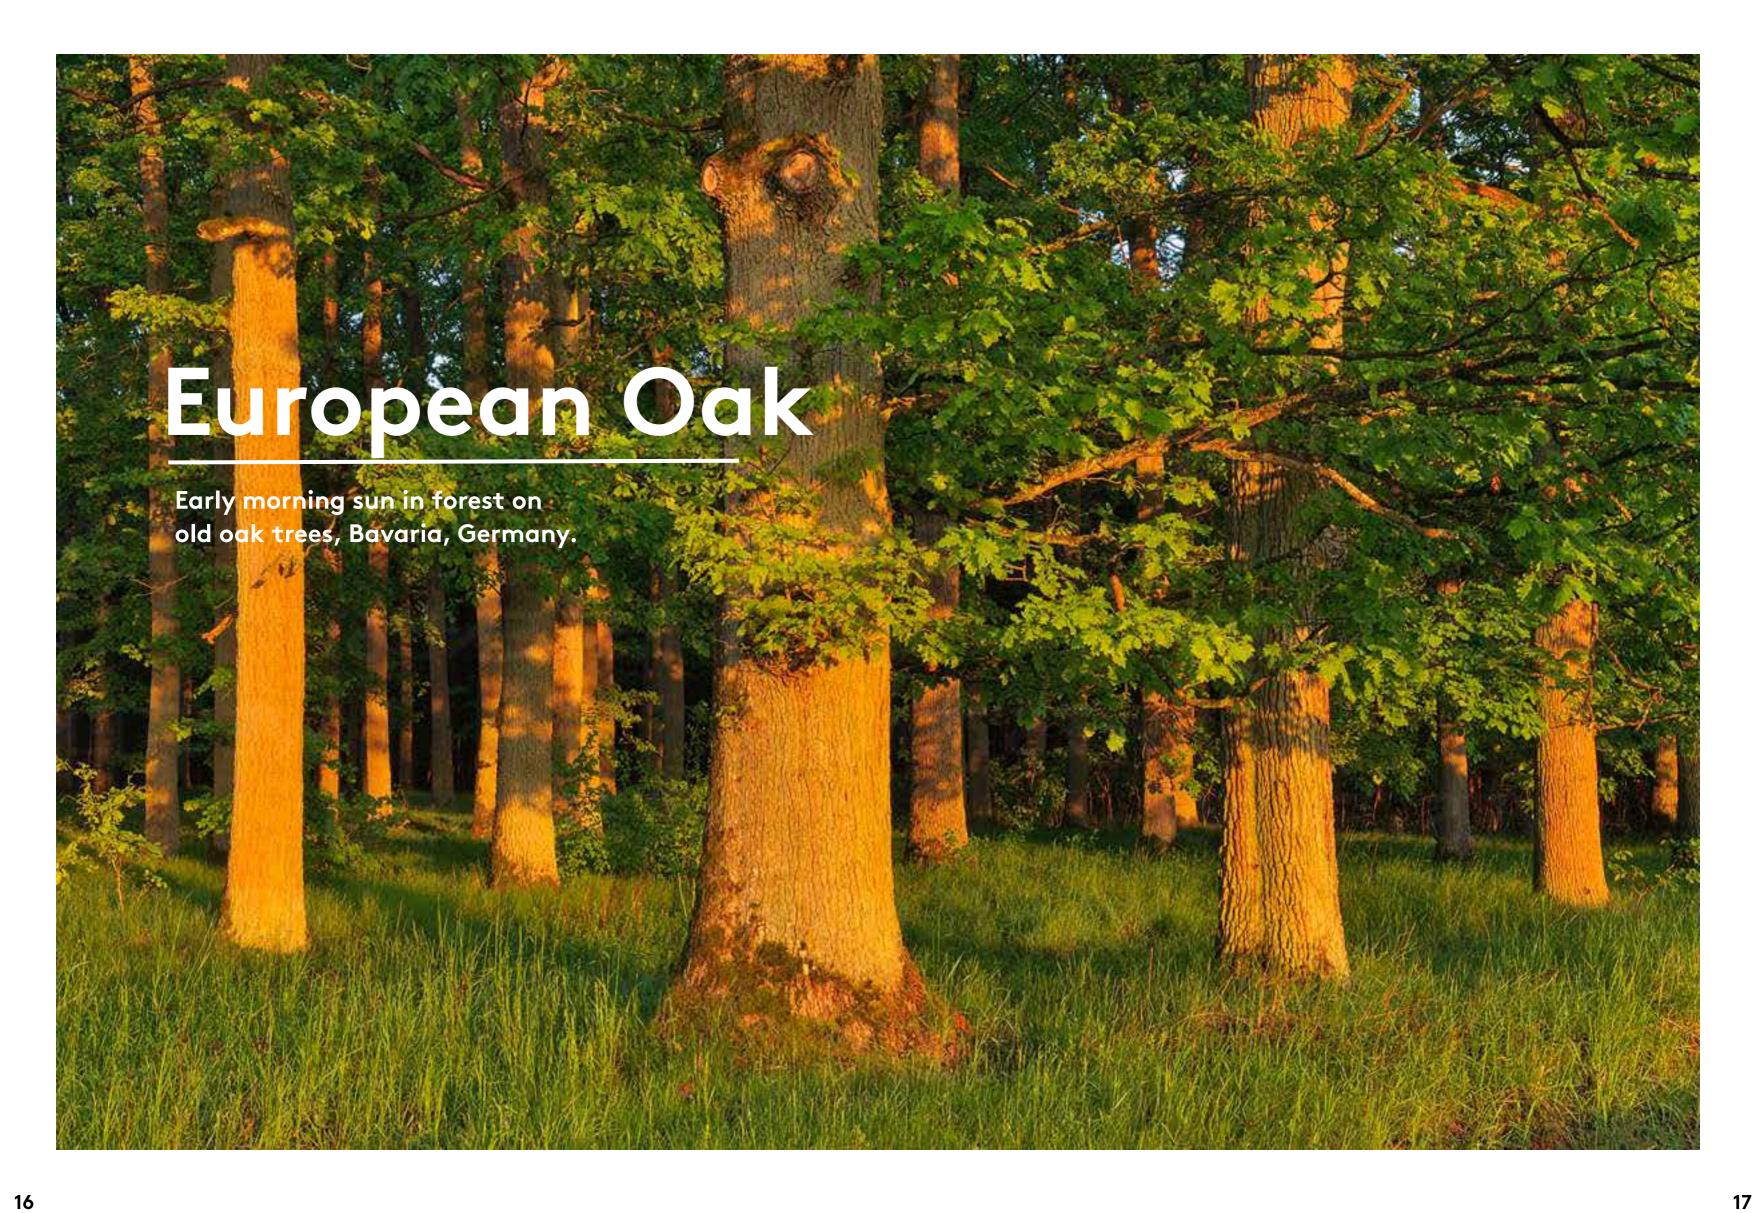

European WOOD

Made with uncompromising quality, we manufacture parquet engineered flooring that meet the highest quality standards for public and residential use. The smooth European Oak floors are offered in subtle, light colors that bring a clean, modern, vibrant look to any space, finished off with a durable ultra-matte urethane finish.




Grade A B C D E

























19
















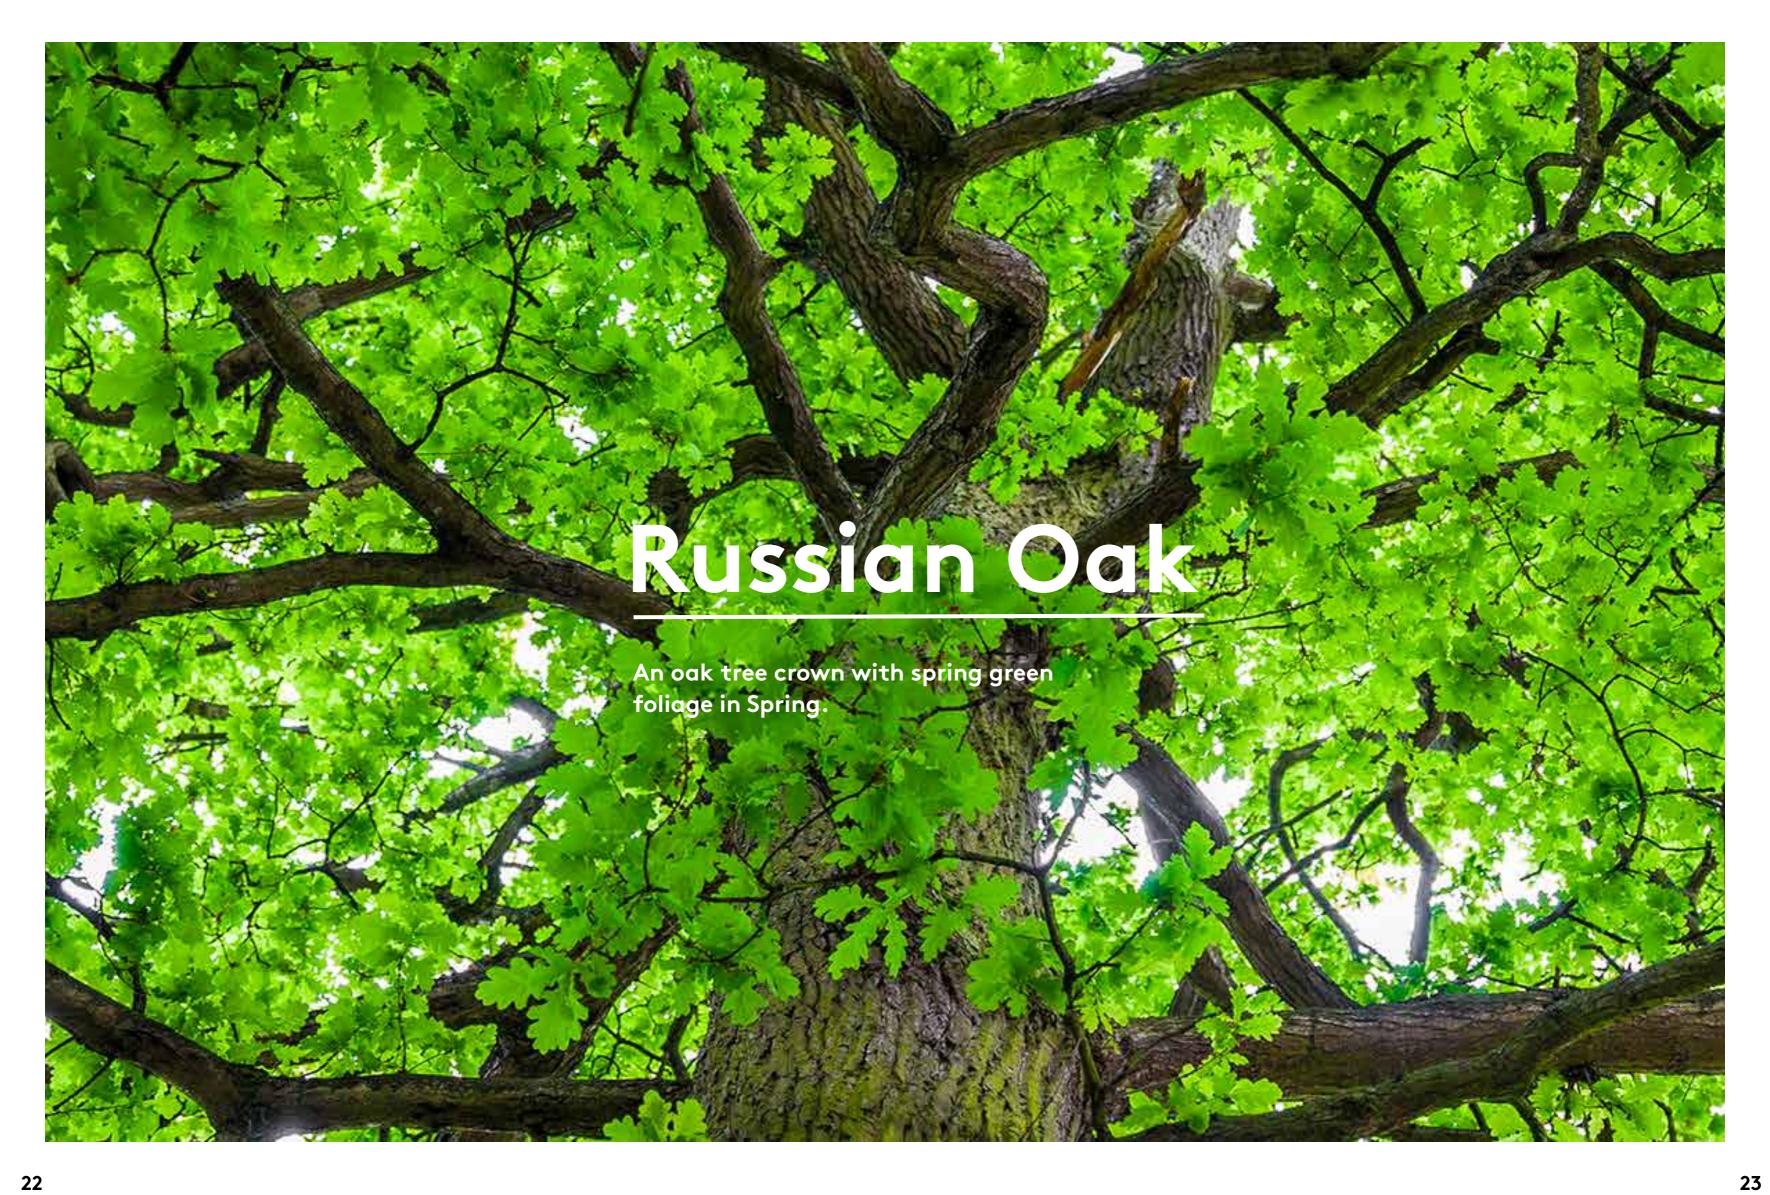

Russian WOOD

Russian oak is delicate and not easily deformed, making it an ideal options for making wooden floors. Russian white oak is not too expensive in the case of extremely high quality. It is a high quality material with good quality and low price, which is more suitable for ordinary consumers.





























25












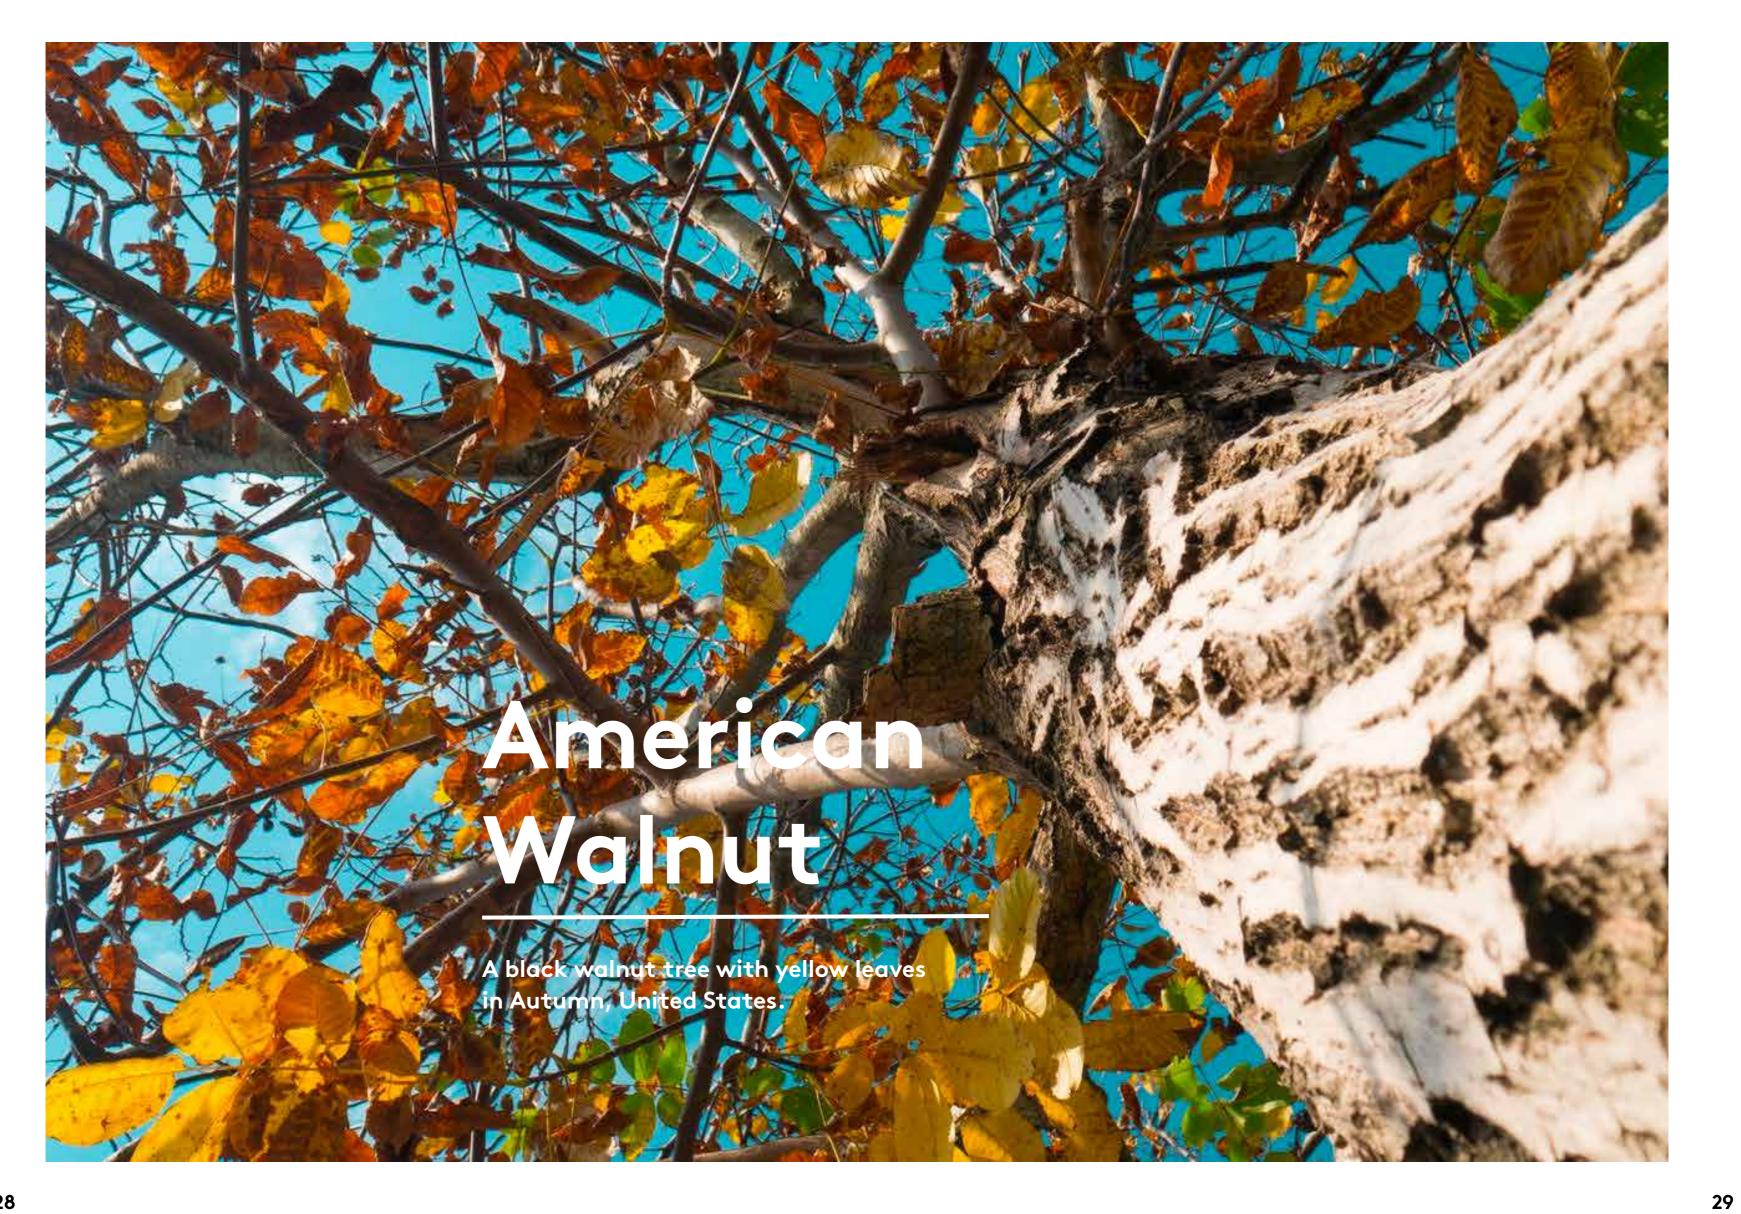

American WOOD



The dark, rich chocolate colors of the hardwood and the lighter-colored sapwood combine to create a flooring surface that is both versatile and sumptuous. Tight grain can give black walnut floors a more uniform look, though boards with curly or wavy can be found as well, as walnut often produces a wider variety of grain patterns. Easily stained to a wide variety of colors, black walnut flooring creates a stunning look that transforms any residential or commercial interior.




















































Burmese WOOD

Through hundreds of years and from generation to generation, teak has been the recognized wood species for exclusive land-based applications. Rightly so, as its unsurpassed characteristics, behaviour, golden colour, stability & durability are simply unmatched by any other tropical hardwood species.







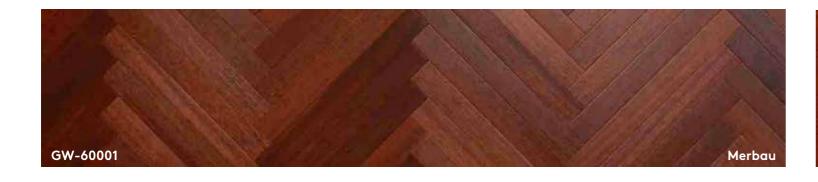





Artistic MOOD PLANE



Artistic is our latest fashion colletion enables adding a touch of style to your interior, creating a homely atmosphere and radiates warmth under your feet. It also has a long service life and increases the value of your home.





SHOWROOM Portfolio


























Welcome to visit
our beautiful
Showroom
and Mill in China.

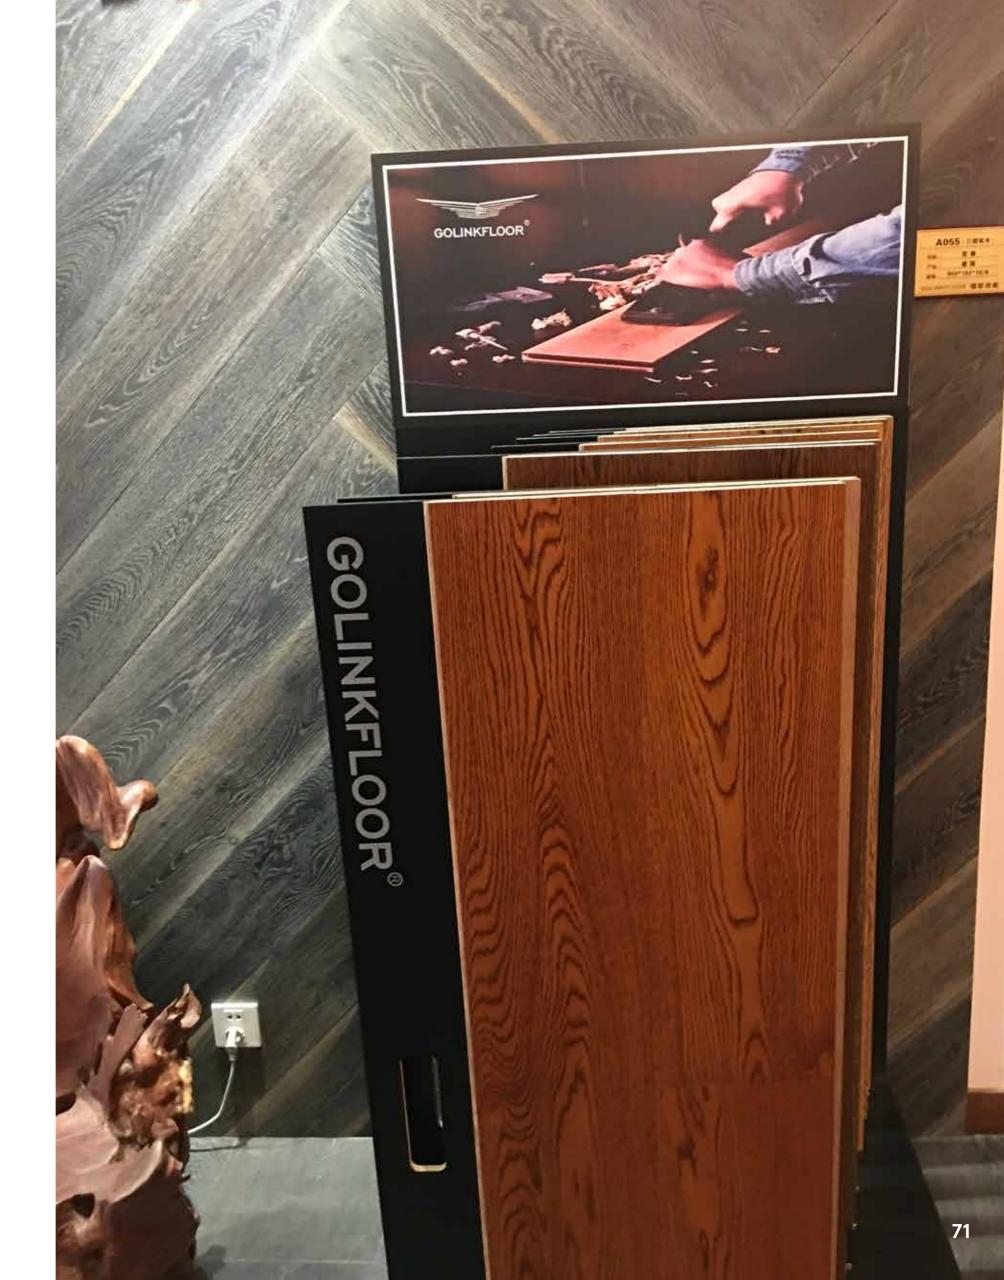

European & Russian WOOD FLOORS DESIGN RANGE

Natural elements are an integral part of all interior spaces giving a sense of escapism, connection and sanctuary.








European & Russian

WOOD FLOORS DESIGN RANGE

Our oak flooring colours and product collection have been meticulously designed to enhance and inspire designers with the creativity and the ability to transform visions into reality.





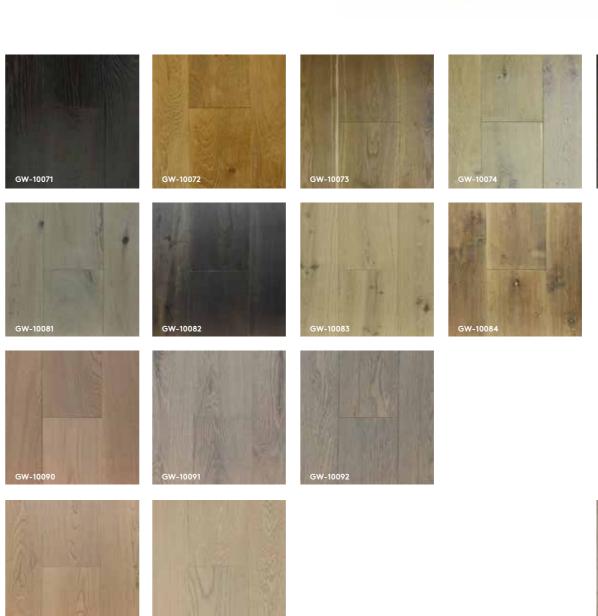



75



Engineered Floor Structure.

GOLINKWOOD™ (GOLINK™, GOLINKFLOOR®) engineered woodflooring is made of high quality thickness **2-6mm** veneer from Russian oak, European oak, black walnut, Burma teak and other tree species with various surface treated like light brushing, hard brushing, antique, embossed, natural saw mark, artificial saw mark, antique, smoke, chemical change etc.

Based by eucalyptus or Russian birch plywood.

4-Side Bevel • To get theflooring made with the right bevel style is an important technical information. Square Edge Micron-Bevel Edge 0.3-0.5mm Micro-Bevel Edge 0.5-0.7mm Eased Edge 0.7-1.0mm Full Bevel Edge 1-1.5mm Joint System •

Surface Treatment

UV lacquer / UV oiled / Hardwax oil / invisible Oil by brand: Germany Treffert/Loba / BONA / OSMO and so on. Brush / Hand scrape / Carbonized / Antique / Embossed, Natural saw mark / Artificial saw mark / Fumed (Smoke), Chemical Reaction, treaments to meet different customer's requirement.










UV Lacquer Natural Oile Handscraped

Wood Veneer

Species of oak, black walnut, short acacia, merbau, ASH made by 3 main sawing ways make the veins of wood veneer look various.



Quarter Sawn Plain Slice

Base Board

F4 STAR Phenolic glue free formaldehyde eucalyptus plywood with thickness 7-15mm. Cross grain Russian Birch plywood imported from Russian with ZERO overlapping and gaps and even thickness.





Eucalyptus Plywood Birch Plywood

Vallinge 2G, 5G or drop lock click system or simple Tongue & Groove made by Germany Homag Machine to get an accuracy milling.








Tongue & Groove

European & Russian Oak Grading Rules.

| Defects | Grade A | Grade B | Grade C | Grade D | Grade E |
|----------------------------|------------|----------------------|----------------------|--|--|
| Sound Knots | <5mm(pink) | √ | √ | √ | V |
| Brown Filled Dead Knots | x | <15mm (repaired) | <25mm (dia) | <45mm (dia) | √ |
| Knot Count | × | <15mm (repaired) | ∞ (repaired) | ∞ (repaired) | ∞ |
| Sapwood | × | <4/board (1900mm) | œ | ∞ | ∞ (repaired) |
| Dark/Black Streaks | × | <10% (surface) | <20% (surface) | <40% (surface) | ∞ |
| Worm Holes | × | × | × | <=1mm(repaired) <3/board(1900mm) | ∞ |
| Checks/Splits | × | × | × | <3x250mm <2 splits/board | <8x250mm <4 splits/board |
| Rot/Decay | × | × | × | <5mm(width) <15mm(length) <2/board | <5mm(width) <40mm(length) <3/board |
| Dark Pockets | × | × | × | × | × |
| Volume of Dead Knots | × | × | <4/board (1900mm) | <6/board (1900mm) | ∞ (not gathered) |
| Black Filled Knots | × | × | × | black or brown filler repaired | black or brown filler repaired |







CD Grade Split for European Oak







Wood Veneer.

Wood veneers professionally well graded in defects, moisture, thickness tolerance, warping/twisting ratio/color and texture, can be supplied as per the specific requirements of customers.


Veneer Species We Sell Best.

| Species | Cutting Method | Invoice Size | Actual Size | Grade |
|--------------|----------------|---------------|-----------------|-------------------|
| | Sawn Cut | 600*90*3 mm | 630*100*3.2 mm | AB/ABC |
| | Sawn Cut | 910*125*3 mm | 930*135*3.2 mm | AB/ABC |
| | Sawn Cut | 1900*150*3 mm | 1930*160*3.2 mm | AB/ABC/Sapwood CD |
| European Oak | Sawn Cut | 1900*190*4 mm | 1930*200*4.2 mm | ABC/ABCD |
| Russian Oak | Slice Cut | 1900*150*2 mm | 1930*160*2 mm | AB/ABC |
| Black Walnut | Slice Cut | 1900*150*2 mm | 1930*200*2 mm | AB/ABC |
| Burme Teak | Sawn Cut | 1900*190*4 mm | 1930*200*4.2 mm | ABC/ABCD |
| Acacia | Sawn Cut | 2200*220*4 mm | 2230*230*4.2 mm | ABCD/CDE |
| | Sawn Cut | 2200*260*4 mm | 2230*270*6.2 mm | ABCD/CDE |
| | Sawn Cut | 2200*300*6 mm | 2230*310*6.2 mm | ABCD/CDE |
| | Sawn Cut | 2200*240*4 mm | 2230*270*4.2 mm | ABCD/CDE |








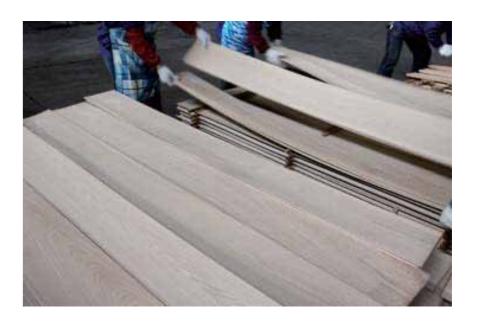

Plank Technical Specifications.

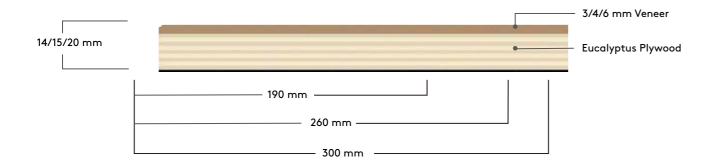

- Quality 7-11 layers (11-15mm) F4*Cross structure ecucalyptus plywood with even thickness. 1.5mm each plywood. No overlapping, No gaps.
- 2. Precise Tongue and Groove with micro-bevel to full bevel from 0.3mm 2.7mm featured by Germany HOMAG machine.
- 3. Eight colors Denalim epoxy resin supports knots and cracking customized repairing for natural look appearance.



Common Dimension


| Veneer | Cutting Method | Thickness | Width | Length |
|--------|-----------------------|-----------|--------|---------|
| 3 mm | Sawn Cut | 10 mm | 70 mm | 490 mm |
| 3 mm | Sawn Cut | 10 mm | 90 mm | 540 mm |
| 3 mm | Sawn Cut | 14 mm | 148 mm | 888 mm |
| 3 mm | Sawn Cut | 12 mm | 125 mm | 900 mm |
| 2 mm | Slice Cut | 12 mm | 125 mm | 1200 mm |
| 3 mm | Sawn Cut | 14 mm | 90 mm | 900 mm |
| 3 mm | Sawn Cut | 14 mm | 148 mm | 1860 mm |
| 3 mm | Sawn Cut | 14 mm | 190 mm | 1900 mm |
| 4 mm | Sawn Cut | 15 mm | 148 mm | 1860 mm |
| 4 mm | Sawn Cut | 15 mm | 190 mm | 1900 mm |
| 6 mm | Sawn Cut | 20 mm | 190 mm | 1900 mm |
| 6 mm | Sawn Cut | 20 mm | 220 mm | 2200 mm |
| 6 mm | Sawn Cut | 20 mm | 240 mm | 2200 mm |
| 6 mm | Sawn Cut | 20 mm | 300 mm | 2200 mm |
| 6 mm | Sawn Cut | 20 mm | 340 mm | 2200 mm |



Plank & Strip. Regular Width


Our plank is offered in a range of stocked and custom widths from 70 to 340 mm.

Stocked widths include
70 mm, 90 mm,
125 mm, 148 mm,
190 mm, 220mm,
240 mm, 300mm, 340 mm,
and are all engineered.

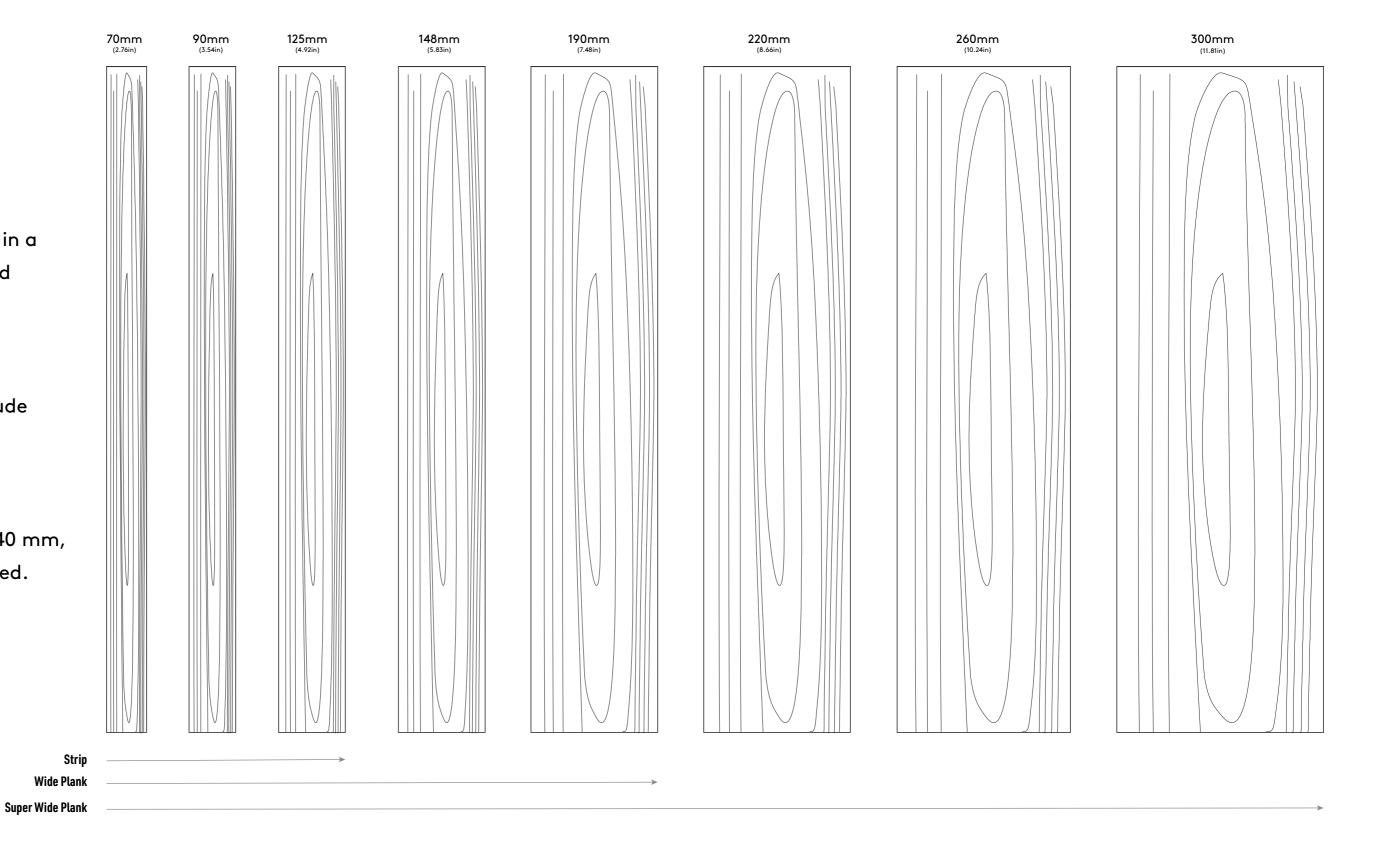

Plank & Strip. Regular Length



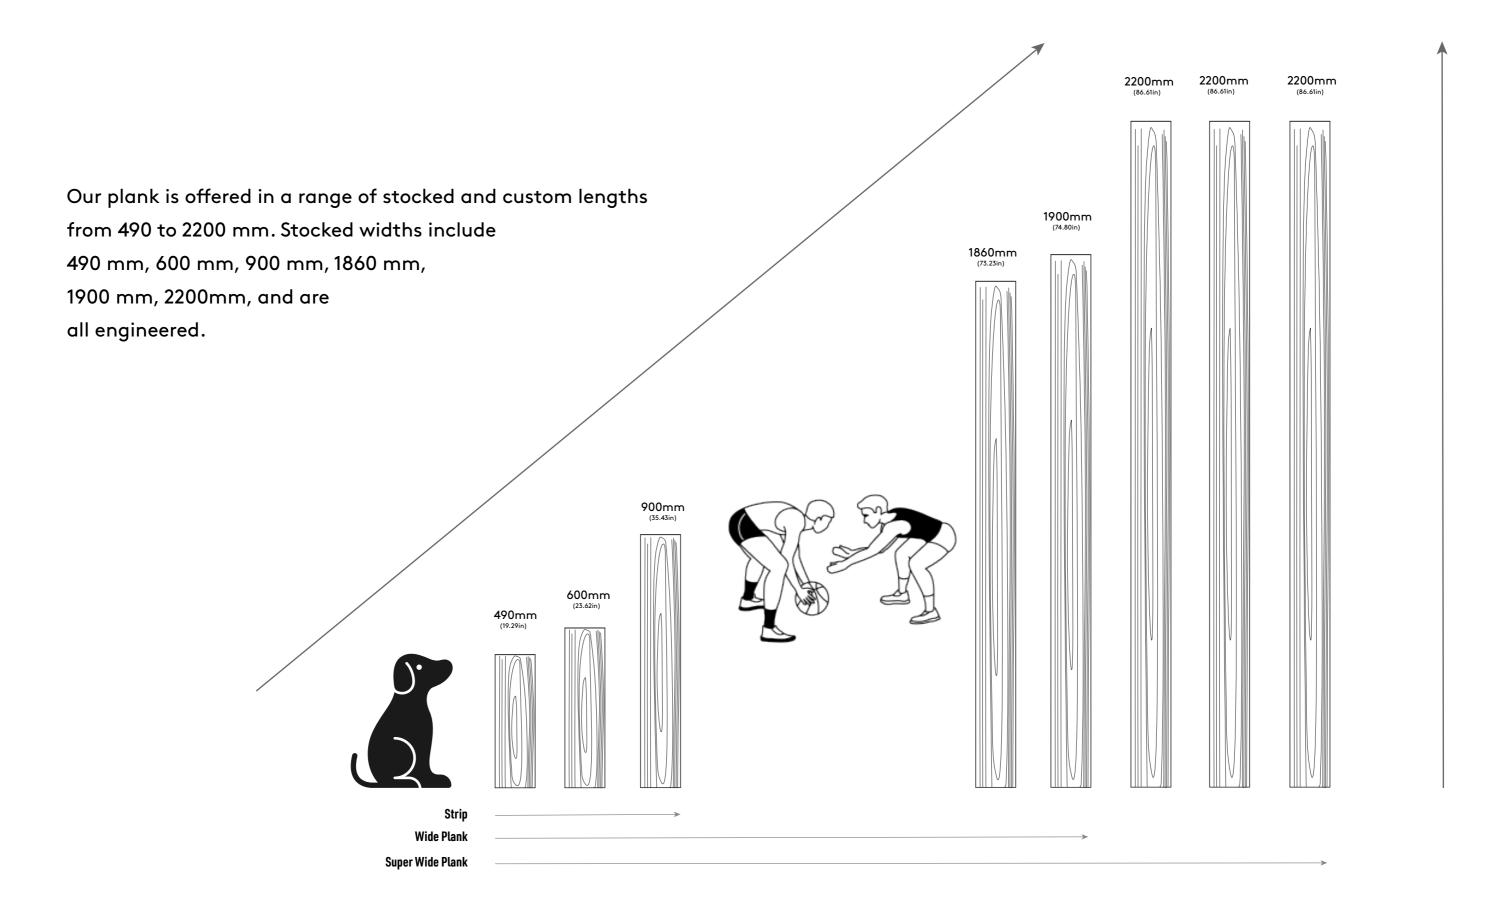

Engineered Chevron.

- ► The only one ultra-high-speed Chevron grooving machine in the world with a daily output of 2000sqm.
- ► High-precision equipment and strict quality control system (step inspection) to realize various angles of 45°/60° in Chevron production.
- ► Length up to 1900mm and width 300mm to achieve the largest chevronflooring choice for designers.



45 ° Dimension.

▶ 810 * 90 * 14 mm

60° Dimension.

▶ 825 * 125 * 14 mm




Super Wide Chevron Dimension.

▶ 840 * 190 * 15mm ▶ 1710 * 190 * 15mm ▶ 1900 * 300 * 18mm

▶ 850 * 148 * 14 mm

Angle Accuracy Inspection

















With the trends of Chevron products more and more popular in recent years. Our mill developed chevron floorings from narrow to wide sizes, customize specification and angle available as well.







Engineered Herringbone.

We can provide variety size combination to get different ways of installation & layout, satisfying theideas from customers.

- ▶ 490 * 70 * 10/3 mm
- ▶ 490 * 90 * 10/3 mm
- ▶ 930 * 150 * 14/3 mm



Black Walnut



European Oak



Doussine



Black Walnut

Surface Treatment.

For long-lasting pleasure

- 1. Brush
- 2. Handcraft
- 3. Smoke & Fume
- 4. Carbonize
- 5. Chemical Reaction
- 6. Lacquer
- **7.** 0il
- 8. Raw (Unfinished)



* The deep impregnation repeated on the naturally oiled floors several times emphasises the natural wood grain and protects the wood from the inside.

^{*} The floors are given a multi-component lacquer finish, which makes the floor elastic

and increases its scratch resistance.

Adhesive Coating.



American Franklin Phenolic -Hardener 200 adhesive.













Germany Treffert AL2O3 scratch-resistant UV lacquer coating.

Green Wood Floor.





No.238 Beihu Stree, Deqing, Huzhou, China Phone: (+86) 198 8317 9548 golinkwood.com|info@golinkwood.com|instagram: golinkwood