



# PRODUCT CATALOGUE

**GOLINKFLOOR**





# INNOVATIVE. & UNIQUE



## DEQING HUZHOU, CHINA - 1996

Premium multi-layer engineered wood flooring from GOLINKFLOOR™. All our engineered wood species are imported from Europe, Russia, America, Burma and Indonesia, then manufactured in China.

We are the ideal flooring solution for luxurious living, environmental protection, classic and traditional sophistication, and modern sensibility that speaks to the beauty, and art of premium flooring.

**29**

COUNTRIES

**1,800,000**

TURNOVER  
(Square Meters)

**95%**

EXPORT





<b>02</b>	<b>HISTORY OF US</b> Our origins	<b>34</b>	<b>COLLECTION; EMERGE</b> Planks, chevron, herringbone
<b>06</b>	<b>OUR OFFICE</b> Aisle	<b>36</b>	<b>COLLECTION; SILENCE</b> Planks format
<b>08</b>	<b>OUR PRODUCTS</b> Meet our products	<b>38</b>	<b>COLLECTION; ARTISAN</b> Planks format
<b>14</b>	<b>SUSTAINABILITY</b> Beauty design and teak oxidation	<b>40</b>	<b>COLLECTION; CREATE</b> Planks format
<b>16</b>	<b>DURABILITY</b> Design for the long run	<b>42</b>	<b>COLLECTION; PARQUET</b> Parquet format
<b>20</b>	<b>PRODUCTION</b> Flooring manufacturing	<b>46</b>	<b>FLOORING SHAPES</b> Design with shapes
<b>22</b>	<b>PACKAGE</b> Flooring pack and send abroad	<b>50</b>	<b>PRODUCT SPECIFICATIONS</b> When length does count
<b>26</b>	<b>COLLECTION; ELEMENTS</b> Planks, chevron and herringbone	<b>58</b>	<b>OAK GRADING</b> European oak grading rules
<b>30</b>	<b>COLLECTION; SILENCE</b> Planks format	<b>60</b>	<b>CERTIFICATES &amp; DECLARATIONS</b>
<b>32</b>	<b>COLLECTION; ELEMENTS</b> Planks, chevron, herringbone	<b>62</b>	<b>SUPPORT &amp; SERVICE</b>

# THE PERFORMANCE OF OUR FLOORING





# MEET OUR PRODUCTS

Good atmosphere starts with the right floor and beauty comes in many shapes and forms. The wide range of our wood floorings gives you the freedom to choose from and their remarkable versatility provides the space for creative possibilities from a feeling of familiar security, through modern naturalness to contemporary design or alpine chic. No matter which interior or living design you decide on, we have the right natural wood floors for you.







## FLOORING

### OUR ORIGIN

Golink flooring product collections are available in planks, herringbone and chevron.

### OUR VALUES

For Golink, quality and trust must come first and we strive for this to be the most natural thing in the past 20 years.

### DESIGN WITH WOOD

Golink offers all things relating to oak wood. Short or long, narrow or wide, in neat rows or in creative patterns.

### NATURALNESS AND SUSTAINABILITY

Approximately 16 percent of Golink flooring is made of the FSC raw material wood. All the other raw materials that we receive from suppliers also undergo strict quality controls during purchasing and the production process.

### OUR TEAM

Golink team of experts are ready to assist you in choosing the right floor for your project. We've been in engineered flooring industry for decades, and we've got the experience & knowledge to prove it!

### COLLABORATIONS

Golink provides high-quality engineered wood flooring solutions for architecture. We manufacture high-end products for commercial, retail, healthcare, hospitality, residential and multi family residence, cooperating with renowned design houses all over the world.

### CUSTOMISE SOLUTION

There are nearly endless design possibilities for creating and customising wood flooring solutions. We can meet most design requests and ideas. Contact our sales staff for information on customized solutions in addition to what is offered in the regular range.

## FINISHES

### LACQUER

Germany Treffert aluminum oxide water-based lacquer to give floor a durable and strong surface.

### OIL

Oils enhance and intensify the natural tone of wood without any gloss, giving permanent wet effect.

### BRUSH

Wire brushing process removes the pulp wood to make the wood grains highlighted.

### HANDCRAFT

Handscrft features wood floors with natural characteristic look antiqued and distressed by hand tools.

### SMOKE

Smoke involves putting the oak into ammonia atmosphere to get reaction of the Tannic Acid in the oak to get special colors.

## MISCELLANEOUS

### TONGUE & GROOVE

Germany Homag Machine crafted accurate milling makes tongue and groove wood flooring smooth, safe to work on barefoot and free of nails.

### 2G & 5 G CLICK LOCK

2G & 5G Click lock makes wood floors installation easy for DIYERS or installation experts, it can also make the wood floors stable and more beautiful.



# A CLOSE UP OF OUR PRODUCT

Golink engineered flooring is composed of 2 layers, top veneer and multilayer plywood support layer, giving the product its stable and moisture resistant qualities. Veneer is consisted of solid hardwoods of oak, walnut, teak. Plywood is made of eucalyptus and Baltic birch resistant to moisture. The defeacts of the wood veneer combinate coating techniques gives Golink flooring its vast design alternatives.

## THE VENEER

The floor veneer is a thin layer of hardwood that together with the plywood forms the multi-layer engineered wood flooring. The main kinds of solid hardwood used for Golink flooring products: European oak, Russian oak, Black walnut, Burmese teak, Ash.

## WOOD SPECIES & SHAPES

European oak, russian oak, black walnut are most popular used on planks, cheveron, herringbone with different sizes and grades.

## GRADES

Oak can be classified as AB, ABC, ABCD,ABCDE, CD, CDE, EF grades with different defects.

AB grade - prime grade comes with clean and clear surface. ABCD also called "Natural Grade" is among the most common grades available, you can see it everywhere!




## THE PLYWOOD

Golink imports E0 and F4 standard of eucalyptus and birch plywood from Austrilia and Russia. For each layer of the plywood runs in a different direction creating a grid of reinforcement to prevent the wood from moving and make floors more resistant to the warping and damage.

## THE COLD PRESS


AT Golink, we use cold press crafts to glue oak veneer and plywood. Glued floor boards will get glued under pressure of 800 ton for 45 minutes.

The adhesive of Franklin REACTITE EP921 allows Golink to create a sustainable and environmently wooden flooring products, also making the wood flooring more stable and durable.

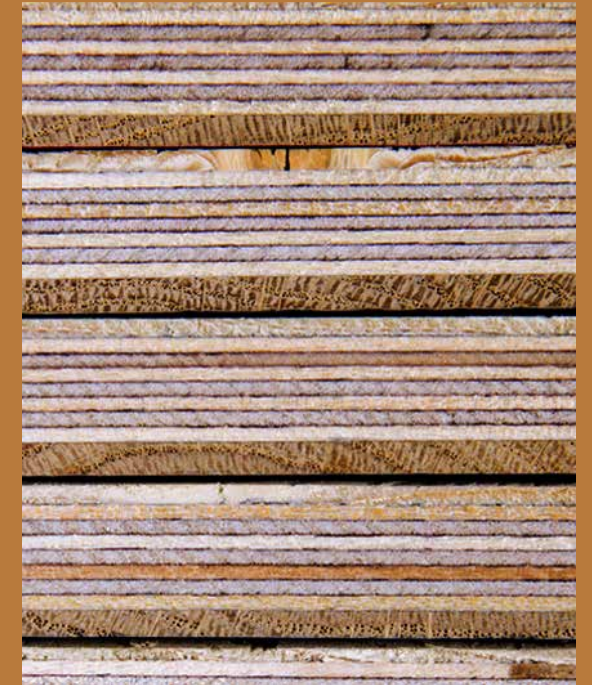

## LAYERS

1. Protective finish. 7/11 layers of UV hardened lacquer or 3 layers of UV hardened Oil.
2. Top layer 2mm(slice cut), 3mm, 4mm, 5mm, 6mm.
3. Support backing layer. 7-11 layers (11-15mm) water resistant eucalyptus or birch plywood.
4. Underfloor heating: cross cutting from the bottom for plywood backing.

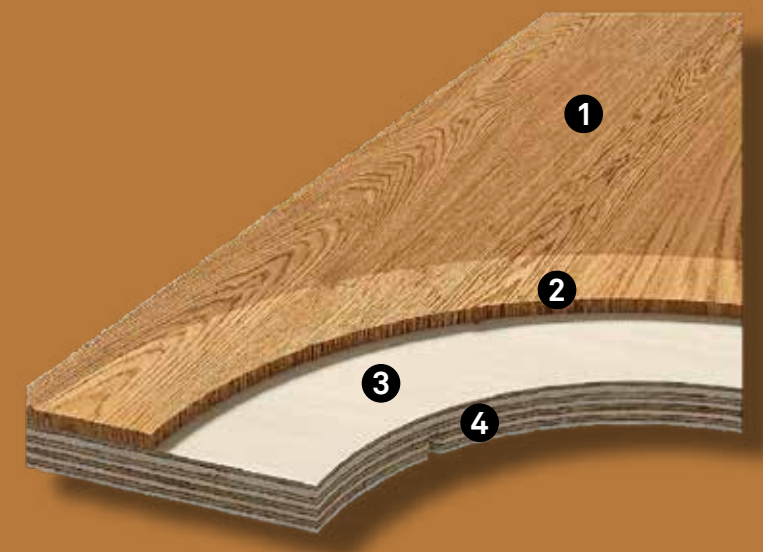



# CONSCIOUS BEAUTY DESIGN

We are a Chinese brand specialized in wood flooring solution for public spaces, designing and creating quality engineered wood flooring for retail premises, hotels, offices, education & healthcare facilities and much more. Our flooring is visually attractive, durable, sustainably produced and easy to care for.

## CREATIVE POSSIBILITIES

Across Golink flooring collections, several formats are available – including max 2200 cm length planks, 45° and 60° chevron and herringbone. To find out which collections are available in which format, visit [golinkfloor.com](http://golinkfloor.com) and [golinkwood.com](http://golinkwood.com).

Golink flooring has either good durability classification, fire resistance and slip resistance. Plank width ranges from 125 mm to 300 mm, thick ranges from 10 mm to 21 mm. Creative laying of tongue and groove, plus click lock is possible with planks, chevron and herringbone resulting in almost unlimited design potential

Our flooring collections are results of a combination of aesthetics, functionality and market preference. All products are based on the characteristic Oak and the stable eucalyptus and birch plywood structure.

## DURABILITY

Golink flooring is durable, strong and retains its appearance without deformation, making it a perfect solution for high-intensity commercial environments. All collections have durability with Germany Treffert AL2O3 coating and come with 25-year warranty.

## BEST ENVIRONMENTAL WOOD

Our raw material oak, walnut, teak only come from environmental responsible wood suppliers of FSC & TSCA. Approximately 16 percent of our engineered flooring is made of the FSC raw material wood.

## INDOOR ENVIRONMENT

Our floors are inherently hypoallergenic which ensures better indoor air quality. The floors are also free from formaldehyde.





### 100% "REAL" BURMESE TEAK

Burma teak, king of woods, its unique properties of tight grain, excellent dimensional stability, distinctive fragrance, decorative effect, and noble color make it been the first choice for luxury interiors in palaces, villas, cruise ships, yachts, and luxury cars.

### TEAK FLOORING ADVANTAGES

Highly resistant to decay; resists termite attack; resists flame spread; holds up well without oil-based finishes.

### WHY OXIDIZED

Burmese teak requires at least 30 hours of strong sunlight before attaining beautiful dusky coloring through the process of photo-oxidation. For urgent orders, recommend placing orders in advance to set aside the time required for an outstanding oxidation.

### WHEN TO MANUFACTURER

The best time to produce our engineered teak flooring is from March to November when the oxidized teak color is at its peak in China!







# DESIGN FOR THE LONG LASTING

The protective finish of our flooring provides its impressive durability qualities. The coating layer is made from 7/11 layers of UV hardened lacquer or 3 layers of UV hardened Oil, creating the characteristic wood look and the flooring's resilience. The backing layers enhance the product performance, adding stability and improving its imperviousness.

## SUITABLE FOR COMMERCIAL ENVIRONMENTS

Golink flooring is durable and stable, following ISO 17959 standard. It is suitable for both commercial and residential settings been tried and tested for more than 20 years.

## LONG SERVICE LIFE

Golink flooring retains its appearance without deformation, making it a perfect solution for highintensity commercial environments. Our products are designed and produced to last throughout their long service lives.

## WARRANTY

All Golink planks, chevron and herringbone floors come with a 25-year warranty.

## MOISTURE RESISTANCE

Golink flooring is moisture resistant and maintain dimensional stability when exposed to high humidity and changes in humidity. However, it shall not be used in areas like bathrooms.

## FIRE RATING

Golink flooring complies with the requirements in the European standard EN 13501-1 (fire classification of construction products) and has achieved the standard rating. This classification is called CflS1 and includes both fire and smoke production.



### ORIGINAL COLLECTIONS

Golink offers beautiful wood flooring collections, ranging from oak, walnut, teak and ash wood species to different shapes of planks, chevron and herringbone with various colors.

### SAMPLE ROOM

Be inspired by the impressive variety of products and the tasteful ambience. Golink show you fantastic floor samples in sample room with many different variants.

### REQUESTING SAMPLES FROM US

Golink offers hundreds of oak, teak and walnut samples to clients with free, we can meet most design requests and ideas, feel free to contact our sales staff for samples offered in the catalogue and our websites.

### BEAUTY WITH SAMPLE PACK

Golink samples neatly display on the sample stand. All requested sample is packaged with paper carton and plastic film to protect it against humidity according to shipping, storage and beauty requirement.







# FLOORING PRODUCTION

100% Golink ranges are produced in Huzhou, China. The way from tree trunk to round timber to finished engineered wood flooring is long, but well thought out. We value quality in every aspect. Our aim is to offer our customers the best quality and service in the industry. See and follow the journey of Golink wood from its raw state to high-quality engineered wood flooring.

## OAK CLASSIFICATION

Experienced team hand-sort kiln-dry veneers with A, B, C, D grades and carefully check oak veneer thickness according to oak grading standard.

## KILN DRY

Sorted oak veneers are stacked together for moisture balance treatment in kilns for 7 days, together with certain required size birch and eucalyptus plywood.

## OAK SURFACE REPAIRING

Knots and cracking on the surface of floor boards are filled and repaired with 8 shades of epoxy resin.

## SURFACE SANDING

Individual piece of floor boards are sanded to same thickness to make it fit for Tongue and Groove profiling.

## WIRE BRUSH

Wire brush craft makes the floor boards more beautiful and oak or walnut grain stand out. The depth of wire brush can be 0.5-1.0mm, 1.5mm and 2mm.

## T & G PROFILING

Tongue & groove profiling and edge treatment: precision & micro-bevel are achieved through Germany Homag working line so that the floors can be laid together quickly and without difficulty at the construction site.

## UV LACQUER & UV OIL

UV Lacquer & Oil Coating, unfinished flooring get UV Lacquer / Oil Coating finish on coating line with 7 layer (5+2) Germany Treffert UV coating prefinished, or Demark Woca Natural Oil finish.



# FLOORING PACKAGE

Golink engineered wood floorings are neatly packed with delicate paper carton and best quality transparent plastic film to protect it against humidity and damage according to shipping and storage requirement, then moved and stacked on pallets getting ready for container shipping to customers. Good flooring pack can help improve flooring life-span, avoid cupping and warping, also good for acclimation before or after flooring installation.







**” WE CREATE  
EVERYTHING  
IN CHINA  
AND SEND IT  
ABROAD. ”**

DESIGNING GREAT EXPERIENCE IS OUR GAME.



# ELEMENTS



Golink Elements; European Oak



Golink Elements; European Oak

Golink Elements collection draws inspiration from nature featuring original timber colors and simple crafts without stained or slight color stained. Its natural calm and elegant appearance making it one of the most popular options for diverse interiors.

- Natural color with calm characteristics
- Environmental certifications and declarations are available
- 25-years warranty
- Cfl-s1 fire rating
- P3 slip test

AVAILABLE IN: \*



Chevron



Planks



Herringbone




UV Lacquer



UV Oil



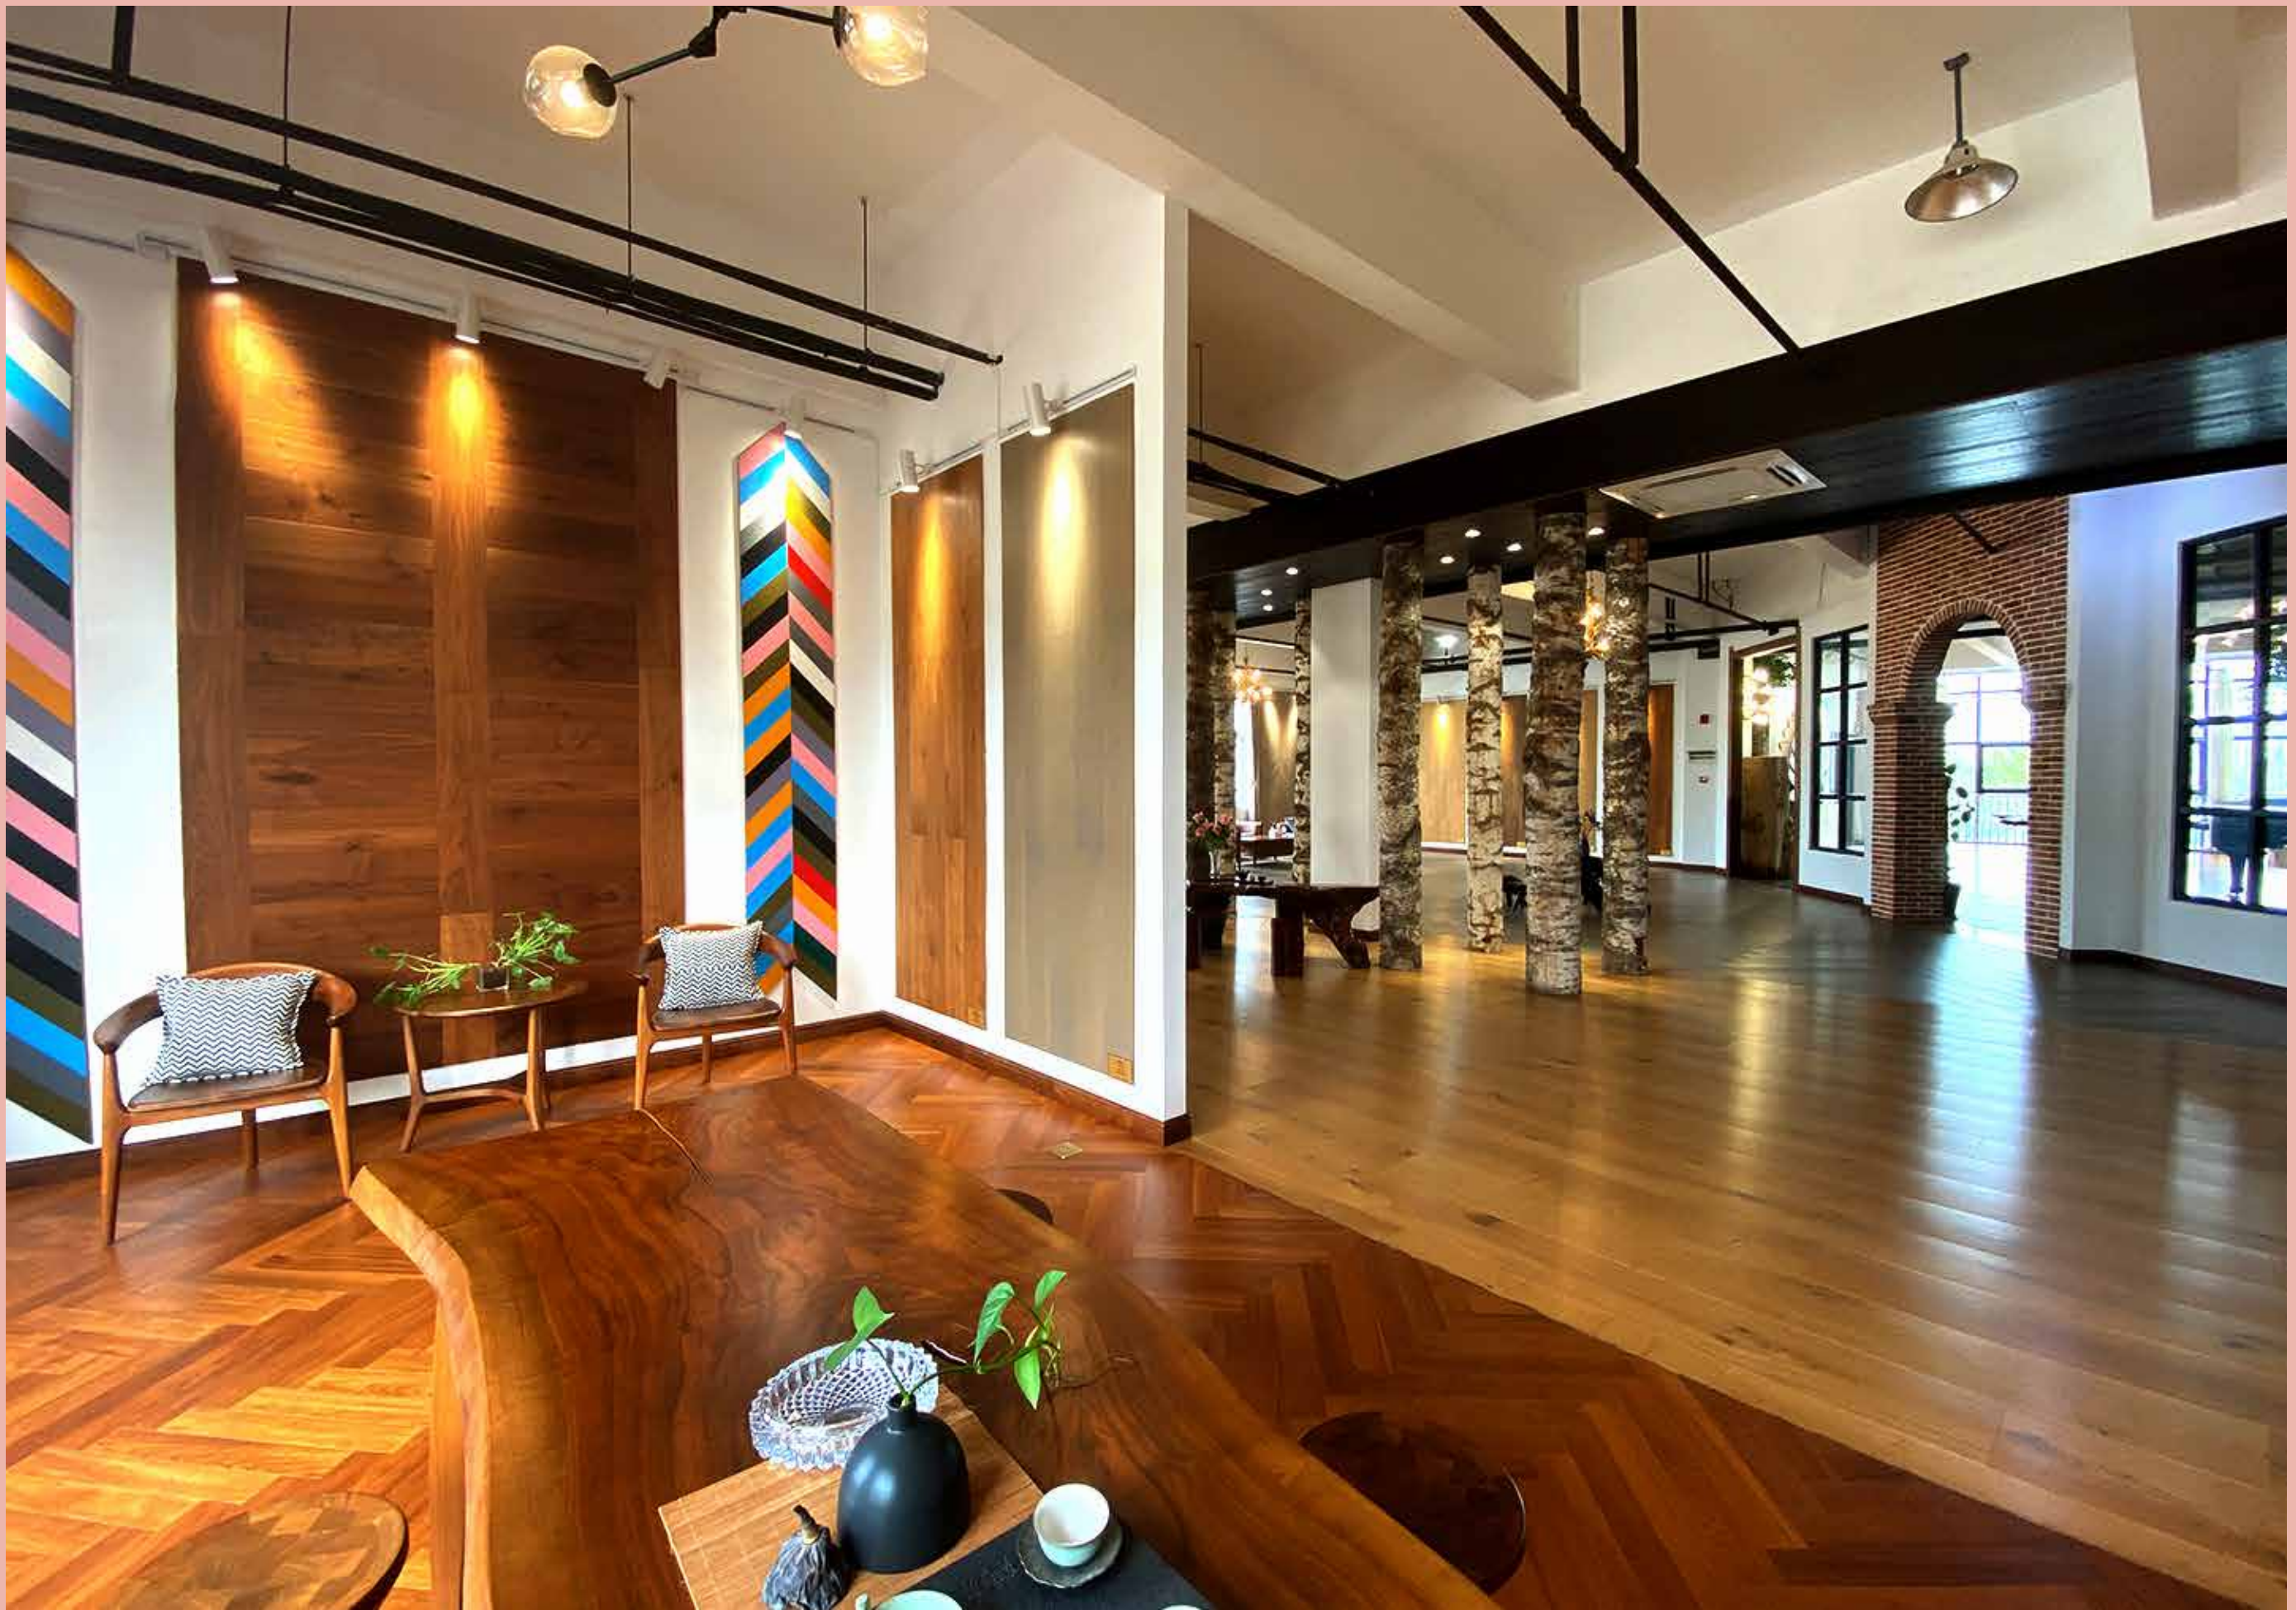

Golink Elements ; Russian Oak





Golink Silence; Russian Oak



Golink Silence; Russian Oak

Silence is a classic, traditional flooring collection characterized by antique colors. The European oak board incorporating wonderful textures and colour tones gives it a rustic appearance. Many of our unique antiqued engineered oak floors are perfect for replicating a reclaimed appearance whilst others have been through more subtle processes like handscraping giving them an air of rusticity.

- Antique color with traditional characteristics.
- Environmental certifications and declarations are available
- European oak supported
- Support Handcraft, UV coating, natural hardwax oil, smoke, white wash, reclaimed oak
- 25-years warranty
- Cfl-s1 fire rating
- P3 slip test

#### AVAILABLE IN: \*



Planks



UV Lacquer



UV Oil



ELEMENTS



Golink Silence; European Oak

Golink Elements; European Oak

Golink Elements collection draws inspiration from nature featuring original timber colors and simple crafts without stained or slight color stained. Its natural calm and elegant appearance making it one of the most popular options for diverse interiors.

- Natural color with calm characteristics
- Environmental certifications and declarations are available
- 25-years warranty
- Cfl-s1 fire rating
- P3 slip test

AVAILABLE IN: \*



Chevron



Planks



Herringbone



UV Lacquer



UV Oil

\*Options available vary in this collection, contact our sales staff for customized solutions.



# EMERGE



Golinkfloor Emerge; European Oak



Golinkfloor Emerge; European Oak

Emerge is a collection showing customers loved colors in the past, light and neutral colours are top ones, it reveals regional characteristics and people's preferences and loved by architects, these colors are most used on high-end project. The Emerge collection offers something that is anything but basic.

- Light and neutral color
- Environmental certifications and declarations are available
- European oak, russian oak supported
- Support natural UV coating, natural hardwax oil, smoke, white wash
- 25-years warranty
- Bfl-s1 fire rating

**AVAILABLE IN: \***



Chevron



Planks



Herringbone



UV Lacquer



UV Oil

*\*Options available vary in this collection, contact our sales staff for customized solutions.*



# SILENCE



Golink Silence; Russian Oak



Golinkf Silence; Russian Oak

Golink Elements collection draws inspiration from nature featuring original timber colors and simple crafts without stained or slight color stained. Its natural calm and elegant appearance making it one of the most popular options for diverse interiors.

- Natural color with calm characteristics
- Environmental certifications and declarations are available
- 25-years warranty
- Cfl-s1 fire rating
- P3 slip test

### AVAILABLE IN: \*



Chevron



UV Lacquer



Planks



UV Oil



Herringbone

*\*Options available vary in this collection, contact our sales staff for customized solutions.*





Golink Artisan; European Oak



Golink Emerge; European Oak

Artisan respectfully draws inspiration from traditional craftsmanship with a band-sawn appearance, combining waved patterns, design of the past and contemporary looks with the exciting, giving a rustic flare to our most popular colours.

- Antique color with traditional characteristics
- Environmental certifications and declarations are available
- Support Handcraft, UV coating, natural hardwax oil, smoke, white wash, reclaimed oak
- 25-years warranty
- Cfl-s1 fire rating
- P3 slip test

#### AVAILABLE IN: \*



Planks



UV Lacquer



UV Oil

*\*Options available vary in this collection, contact our sales staff for customized solutions.*



CREATE



Golinkf Create; European Oak



Golinkf Create; European Oak

Create collection origins from people's preference on the most natural-looking finishes. We employ several different techniques to achieve more natural-looking wood flooring colors: Fuming (aka Smoking), Carbonization, and Reactive Stain technologies to help our customers experience this natural beauty.

- Fuming, Carbonization and Reactive Stain support
- European oak supported
- Environmental certifications and declarations are available
- 25-years warranty
- Cfl-s1 fire rating
- P3 slip test

AVAILABLE IN: \*



Chevron



Planks



Herringbone



UV Lacquer



UV Oil

\*Options available vary in this collection, contact our sales staff for customized solutions.



# PARQUET



Golink Parquet; Russian Oak



Golink Parquet; Russian Oak

Golinkfloor botanic; GL-10231

Parquet is a versatile geometric modules can be used to create particularly striking patterns: available in a wide range of finishes, they allow the wood to engage with other fine materials such as metal, marble and ceramics.

- Customise solution support.
- Environmental certifications and declarations are available
- European oak, teak, black walnut support.
- Support UV coating, natural hardwax oil, smoke, white wash.
- 25-years warranty
- Cfl-s1 fire rating
- P3 slip resistance.

**AVAILABLE IN: \***



Versailles



Chevron & Hexagon



Herringbone



UV Lacquer



Polygon



UV Oil



Hexagon

\*Options available vary in this collection, contact our sales staff for customized solutions.









# DESIGNING WITH OUR FLOORS

We create and build wood flooring original formats, available in planks, chevron and herringbone, our floors also support customized solutions, providing various timber species of European oak, Russian oak, Black walnut, teak, so architects and interior designers can custom their projects through devising our floors specifications.

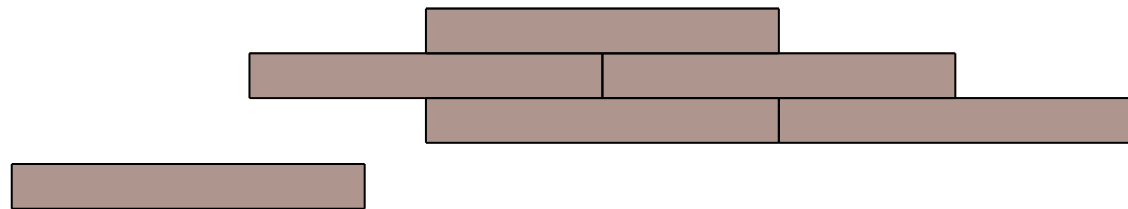


## FLOORS ORIGINAL FORMAT


Our floors are made of 2 - 6 mm high quality lamella from European oak, Russian oak, Black walnut, Teak with the most stable eucalyptus and birch plywood. Length ranges from 490 - 2200 mm, width ranges from 70 - 340 mm.

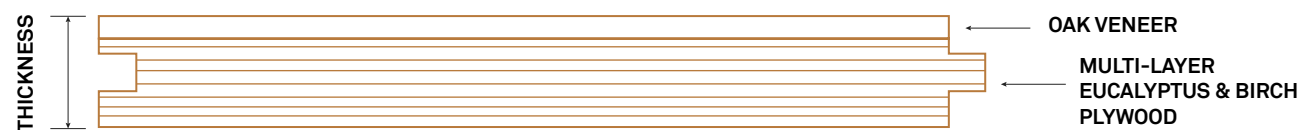


## PLANKS

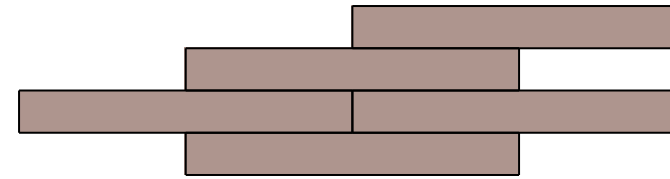


## 60° CHEVRON

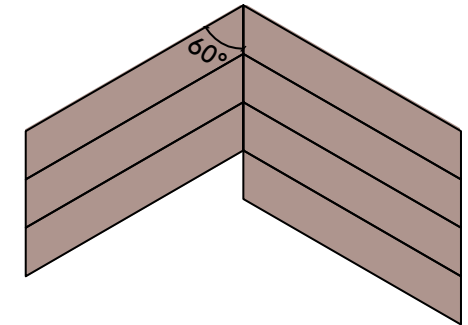

## 45° CHEVRON

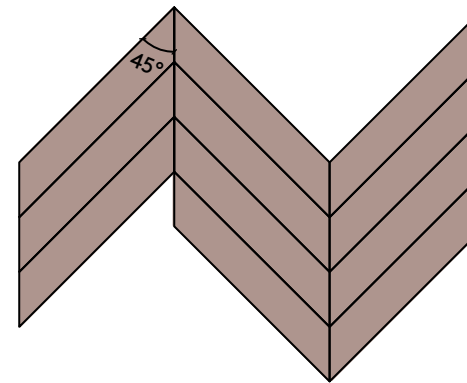

## HERRINGBONE

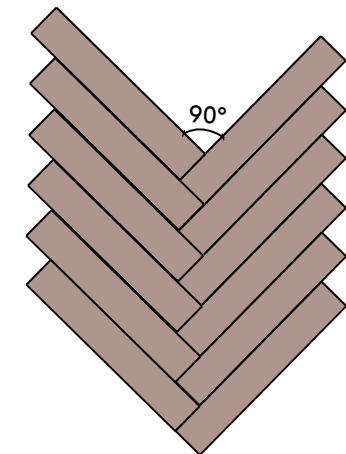

## PLANKS

Plank flooring features long individual strips of engineered wood on the floor of a residential or commercial property.

The benefit of hardwood plank flooring is that it is easy to clean. These wood floors are easy to clean and maintain and naturally patina over time as they are a real wood finish

## CHEVRON & HERRINGBONE

Herringbone is a unique floor design that can add depth and aesthetic value to your rooms, it is the ideal flooring design for virtually any room of your property.

The Chevron floor was initially introduced into palaces and manors during the 16th century, its pattern makes every environment more aesthetically pleasing to the eye.







# WHEN LENGTH DOES COUNT

The lengths of the floor boards you choose for your room will have a big impact on the overall look of your floor. Longer plank lengths create a clean visual line because there are fewer end or butt seams/joints, and going with a wider plank, you are drawing attention to your floor and making this a showpiece throughout your entire space.

## THE LENGTH

We supply length: 450 mm, 490 mm, 510 mm, 540 mm, 600 mm, 720 mm, 900 mm, 910 mm, 1200 mm, 1500 mm, 1600 mm, 1860 mm, 1900 mm, 2200 mm. 5500 mm is also available.

## THE WIDTH

We supply width: 70 mm, 90 mm, 100 mm, 125 mm, 148 mm, 150 mm, 178 mm, 190 mm, 200 mm, 220 mm, 240 mm, 260 mm, 300 mm, 400 mm, 450 mm are also available.

For smaller rooms, opt for narrow, short boards. For larger spaces, wider and longer boards are the way to go. The direction also affects the end result. If you lay out your boards lengthwise, your room looks bigger.

\* Options available vary on actual demand, contact our sales staff for more custom length and width.




**1.**  
Length from 450 mm to 490 mm. Suitable for creating a herringbone pattern in a smaller space.

**1-2.**  
Length from 490 mm to 900 mm. Suitable for creating herringbone and chevron patterns in a small space,

**2-3.**  
Length from 900 mm to 1200 mm. Suitable for creating herringbone and chevron patterns for big space, Length from 1200 mm to 1900 mm. Suitable for creating plank floorboards.

**3-4.**  
Length from 1900 mm to 2200 mm. Suitable for creating plank floorboards. Most popular length on market.

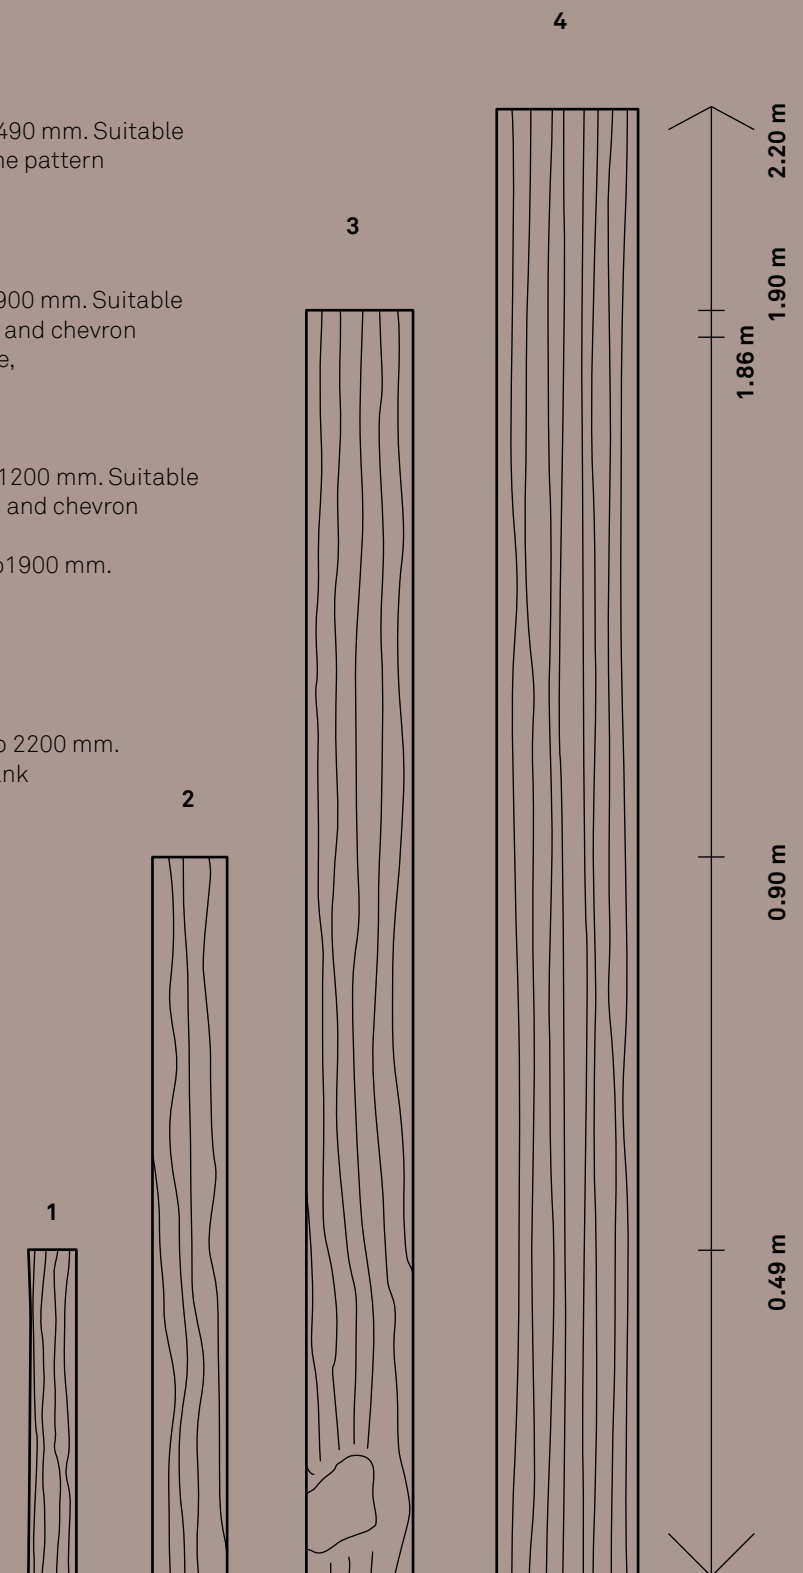



## HERRINGBONE

Do you know why people love herringbone flooring? It is a unique floor design that can add depth and aesthetic value to your rooms.

DIMENSION	LAMELLA	GRADES
450*90*14/3 mm	SAWN CUT	ABC
490*70*10/3 mm	SAWN CUT	AB
540*90*13/4 mm	SAWN CUT	ABCD
600*90*10/2 mm	SLICE CUT	AB
900*150*12/3 mm	SAWN CUT	ABC
910*125*14/3 mm	SAWN CUT	AB

Contact us for more our specifications about herringbone on [golinkfloor.com](http://golinkfloor.com) and [golinkwood.com](http://golinkwood.com)

## CHEVRON

Chevron floorboards looks good whether you use it for a business or home because it makes every environment more aesthetically pleasing to the eye.

DIMENSION	LAMELLA	GRADES
490*70*14/3 mm	SAWN CUT	CDE
510*90*10/3 mm	SAWN CUT	AB
510*90*15/4 mm	SAWN CUT	ABC
540*70*14/3 mm	SAWN CUT	AB
600*90*14/3 mm	SAWN CUT	ABC
620*90*11/3 mm	SAWN CUT	AB
720*125*10/3 mm	SAWN CUT	ABC
770*125*15/4 mm	SAWN CUT	ABCD

Contact us for more our specifications about chevron on [golinkfloor.com](http://golinkfloor.com) and [golinkwood.com](http://golinkwood.com)





## PLANKS

Plank floorboards are suitable for the floors of restaurants, cafes, shared offices, and any other environment that can use a more homely appearance.

DIMENSION	LAMELLA	GRADES
1200*125*10/2 mm	SLICE CUT	AB / ABC
1500*300*16/4 mm	SAWN CUT	ABC
1600*300*16/4 mm	SAWN CUT	ABC
1860*148*14/3 mm	SAWN CUT	ABC
1860*150*10/3 mm	SAWN CUT	CD
1900*100*18/4 mm	SAWN CUT	AB
1900*125*14/3 mm	SAWN CUT	ABC
1900*148*10/2 mm	SLICE CUT	CDE
1900*150*12/2 mm	SLICE CUT	ABC
1900*178*14/3 mm	SAWN CUT	ABC
1900*190*12/2 mm	SLICE CUT	AB / CD / CDE
1900*190*19/3 mm	SAWN CUT	AB / ABC
1900*190*19/4 mm	SAWN CUT	ABCD
1900*190*20/4 mm	SAWN CUT	ABCD
1900*190*20/6 mm	SAWN CUT	AB / ABCD / CD
1900*190*21/4 mm	SAWN CUT	ABCD
1900*200*18/4 mm	SAWN CUT	AB
1900*220*14/4 mm	SAWN CUT	AB / ABC
Contact us for more our specifications about herringbone on <a href="http://golinkfloor.com">golinkfloor.com</a> and <a href="http://golinkwood.com">golinkwood.com</a>		

DIMENSION	LAMELLA	GRADES
1900*220*15/4 mm	SAWN CUT	ABCD
1900*220*20/6 mm	SAWN CUT	ABCD
1900*220*21/4 mm	SAWN CUT	ABCD
1900*240*14/3 mm	SAWN CUT	ABC
1900*240*14/4 mm	SAWN CUT	AB
1900*240*20/6 mm	SAWN CUT	ABCD
1900*300*18/4 mm	SAWN CUT	AB / ABC
2200*190*20/6 mm	SAWN CUT	ABC / ABCD
2200*220*14/3 mm	SAWN CUT	AB / CDE
2200*220*14/4 mm	SAWN CUT	AB / RUSTIC
2200*220*15/4 mm	SAWN CUT	AB / ABC / ABCD / CDE
2200*220*20/6 mm	SAWN CUT	ABC / ABCD
2200*220*21/6 mm	SAWN CUT	ABC / DEF
2200*240*15/4 mm	SAWN CUT	AB / ABCD / CDE
2200*240*20/6 mm	SAWN CUT	ABC
2200*240*21/6 mm	SAWN CUT	CDE
2200*260*15/4 mm	SAWN CUT	ABCD
2200*260*19/4 mm	SAWN CUT	AB / CD
2200*260*20/4 mm	SAWN CUT	ABC
2200*260*20/6 mm	SAWN CUT	ABC / ABCD
2200*260*21/4 mm	SAWN CUT	ABCD
2200*260*21/6 mm	SAWN CUT	AB / DEF
2200*300*15/4 mm	SAWN CUT	ABCD / CDE
2200*300*16/4 mm	SAWN CUT	ABC
2200*300*18/4 mm	SAWN CUT	ABC / ABCD
2200*300*20/4 mm	SAWN CUT	AB / ABCD
Contact us for more our specifications about herringbone on <a href="http://golinkfloor.com">golinkfloor.com</a> and <a href="http://golinkwood.com">golinkwood.com</a>		







# OAK GRADING STANDARD

## ENGINEERED OAK GRADING RULES

Multi-layer engineered plank flooring, European oak rules.

OAK APPEARANCE	A GRADE	B GRADE	C GRADE	D GRADE	E GRADE
Group Knots	●	●	●	●	●
Sound Knot	●	●	●	●	●
Dead Knot	●	●	●	●	●
Edge Knot	●	●	●	●	●
Knot Size	≤ 5mm or less	≤ 15mm	≤ 30mm	≤ 80mm (Filled knots greater than 40mm in diameter)	●
Colour Variation	Most uniform in colour, variation may occur in the direction of the grain	Mild variation, some shadowing	Lively variation, considerable shadowing, slight discolouration	Very lively variation	●
Grain Structure	●	●	●	●	●
Cracks	●	●	Minor end cracks	Natural cracks - heart	Natural cracks - heart
Sapwood	●	●	No more than 25% of the total width of the board, 2 sides	No more than 35% of the total width of the board, 2 sides	●
Mineral Stain	●	●	●	●	●
Black Streak	●	No more than 10% per board	No more than 20% per board	●	●
Cupping	1% of the width	1.5% of the width	2% of the width	2% of the width	3% of the width
Bowing	No greater than 0.5% the length of the board	No greater than 0.5% the length of the board	No greater than 0.5% the length of the board	No greater than 0.5% the length of the board	Bowing no more than 12mm
Spring	No greater than 0.2% the length of the board	No greater than 0.2% the length of the board	No greater than 0.2% the length of the board	No greater than 0.2% the length of the board	Spring no more than 5mm
Worm Holes	●	●	●	●	●
Pin Holes	●	●	●	●	●
Decay	●	●	●	●	●
Checking	●	●	●	●	●
Watermark	●	●	●	●	●

● ALLOWED, NO LIMIT    ● NOT ALLOWED

\* Terms and conditions are available on request.

\*\* European oak grading standard for reference.

\*\*\* Recommend your own European oak grading standard.



# PRODUCT CERTIFICATIONS

Our products are covered some of the industry's most demanding certifications for buildings. This means they can be used with complete peace of mind for their entire lifetime. These third-party verified certifications are one way of demonstrating and communicating the product quality. Because our products cover many countries, we have many certificates for different markets.

**FOR FULL PRODUCT SPECIFICATION AND CERTIFICATIONS:**





# HELLO CONTACT US!

We are flooring brand in China - but we reach out and send our products abroad. With customers across 29 countries, we can help you with our support & service.







To ensure you receive the best support and service from us, please contact us through our service email or telephone.

As well as providing sales assistance, some of our local partners can offer integrated solutions for installation and maintenance.

Please visit [golinkfloor.com](http://golinkfloor.com) or [goilnkwood.com](http://goilnkwood.com) for more our product specifications.



# MEET HIGH PERFORMANCE FLOORING COLLECTION

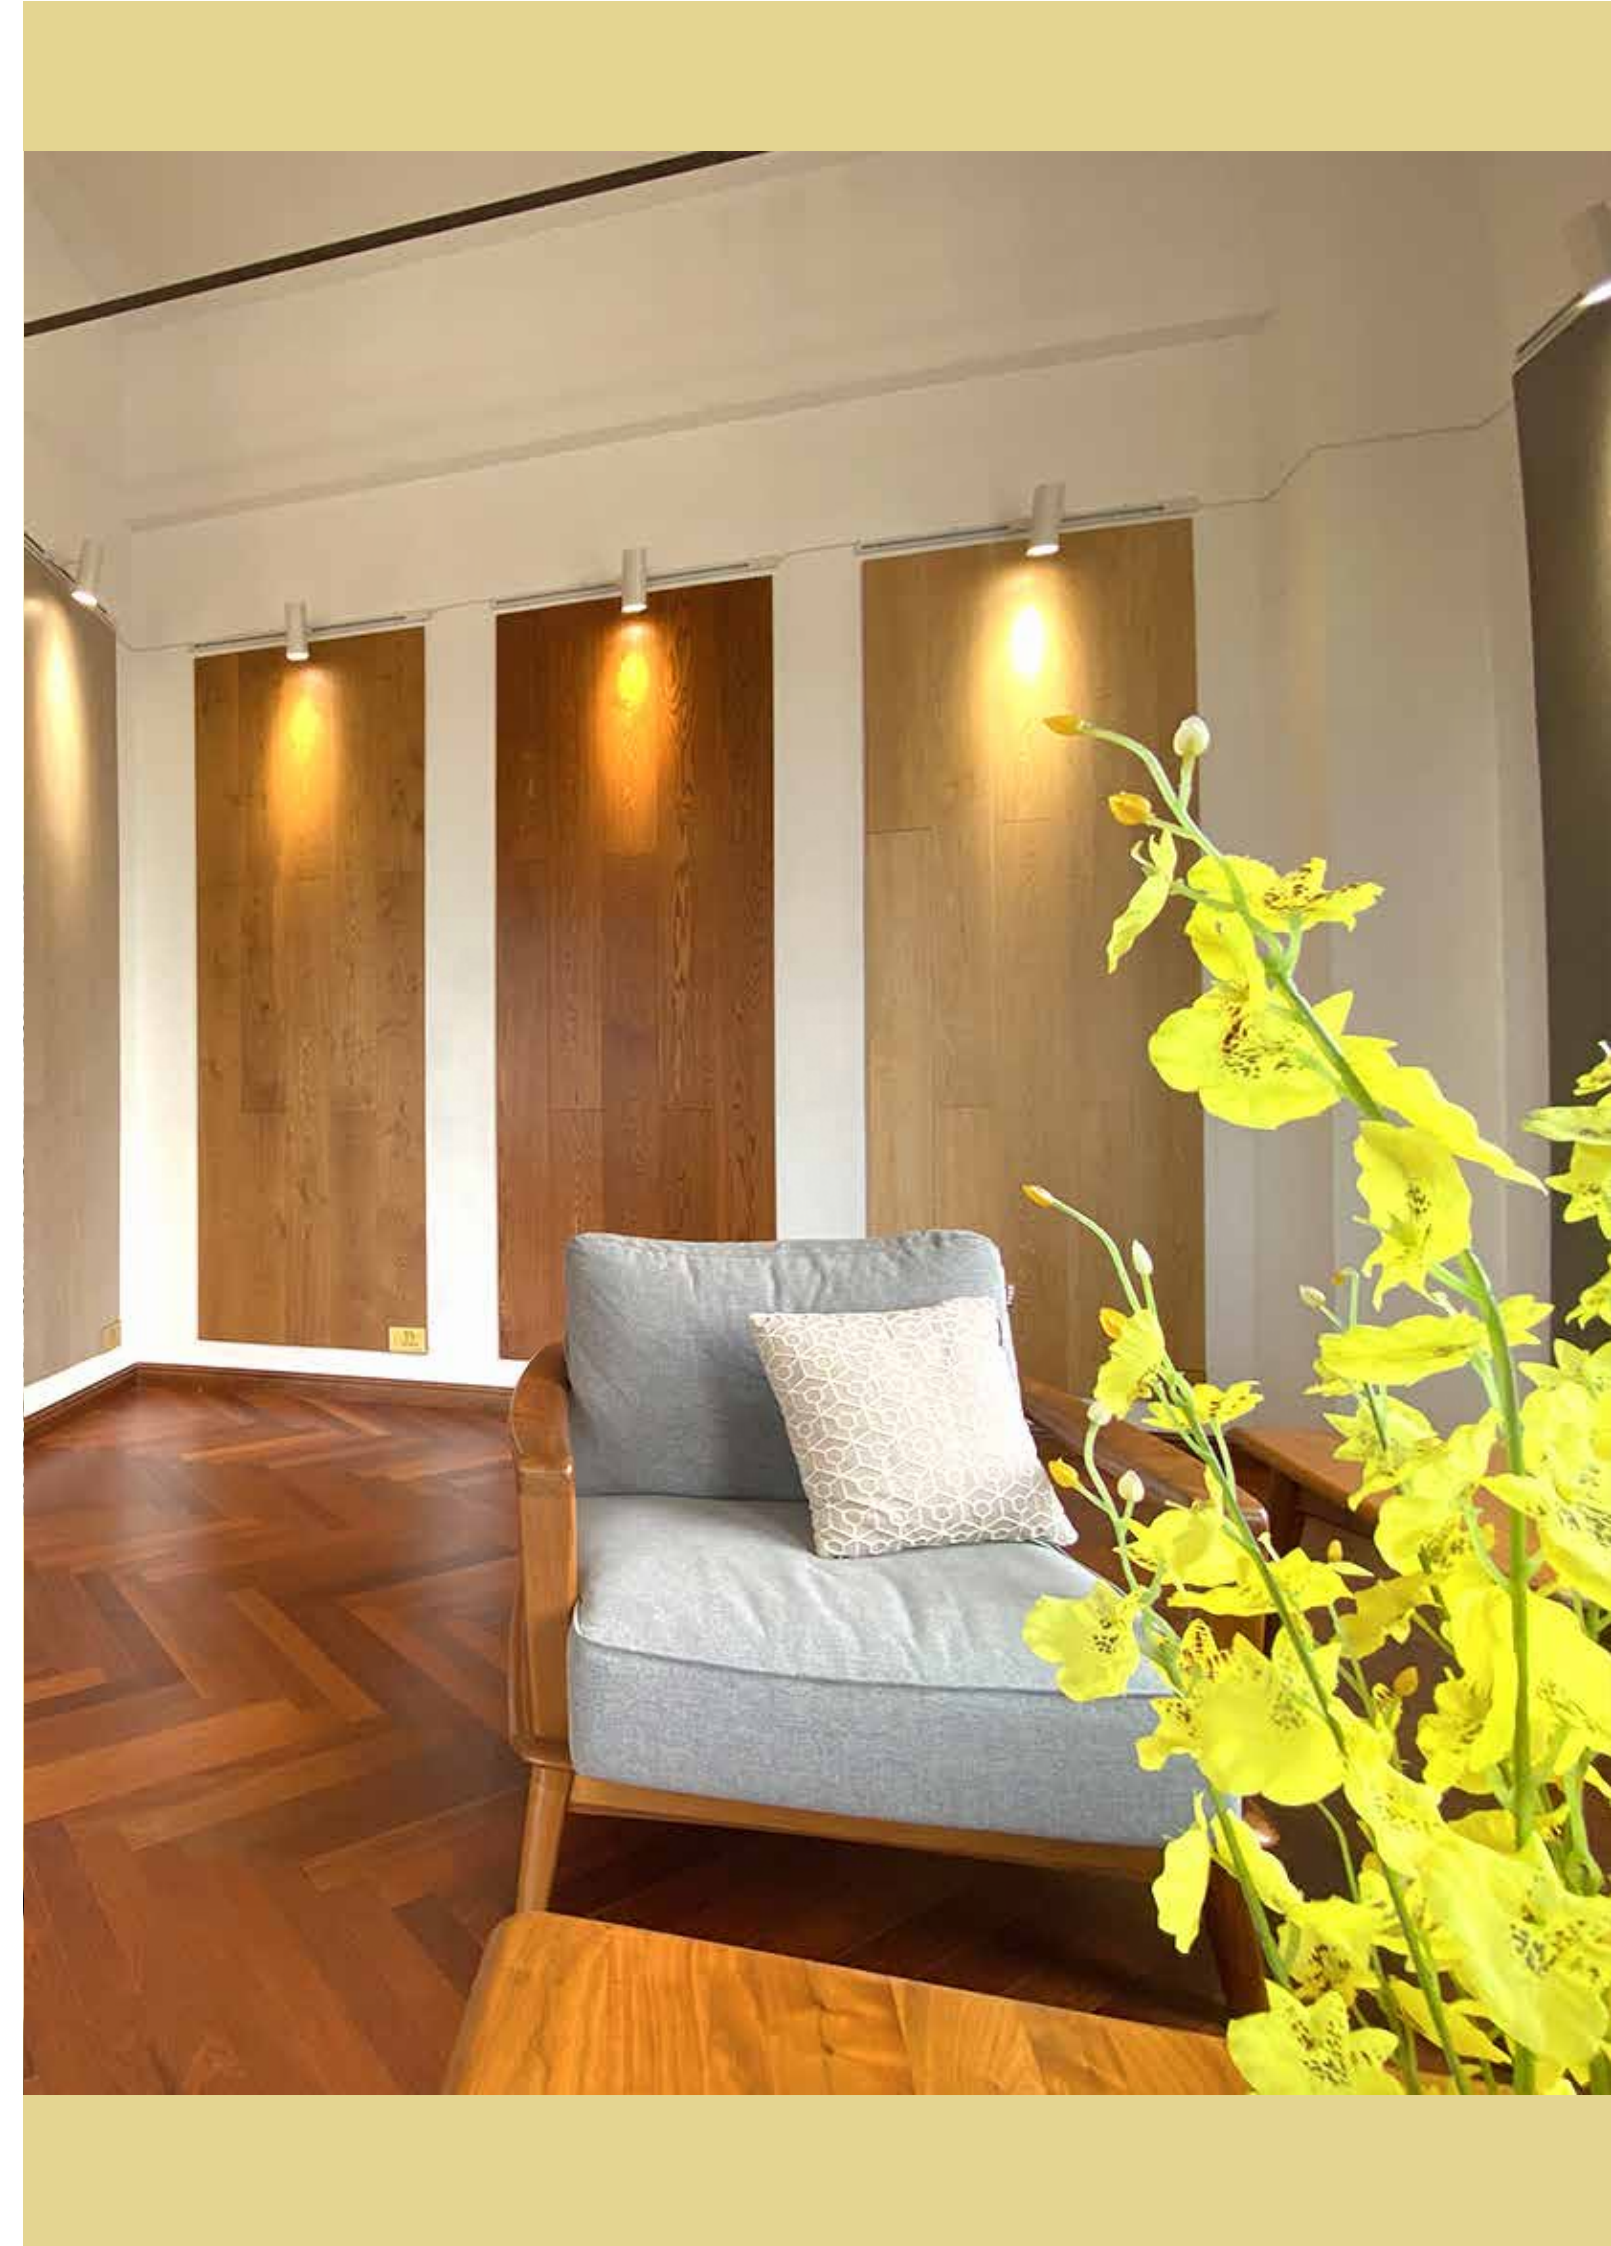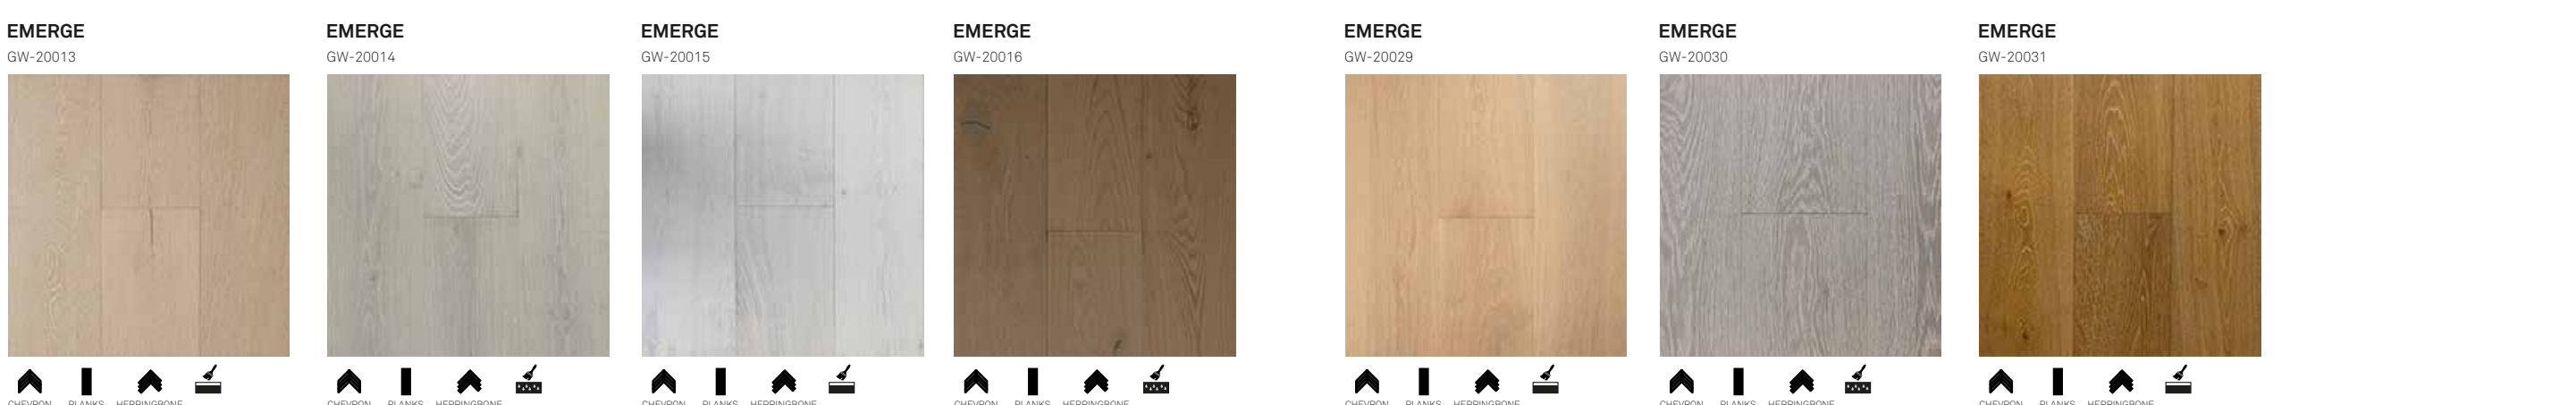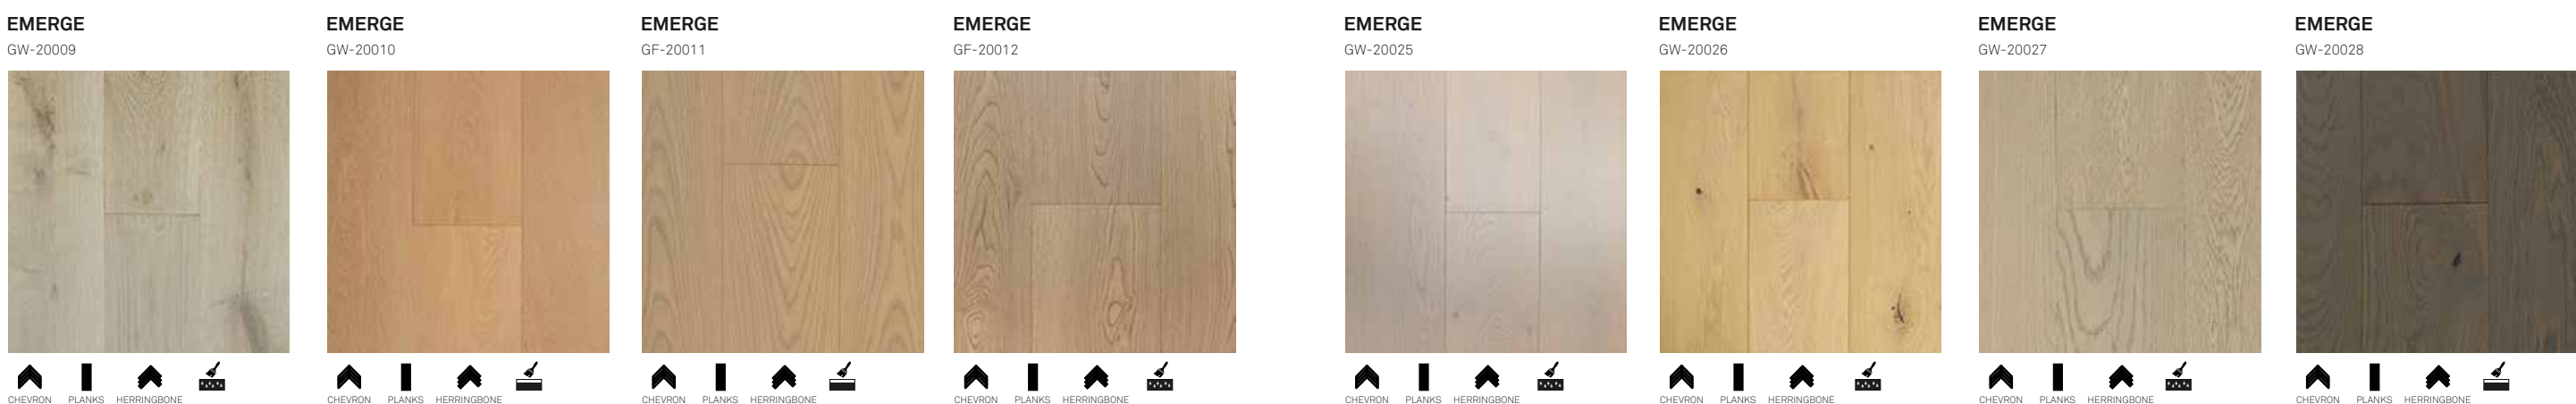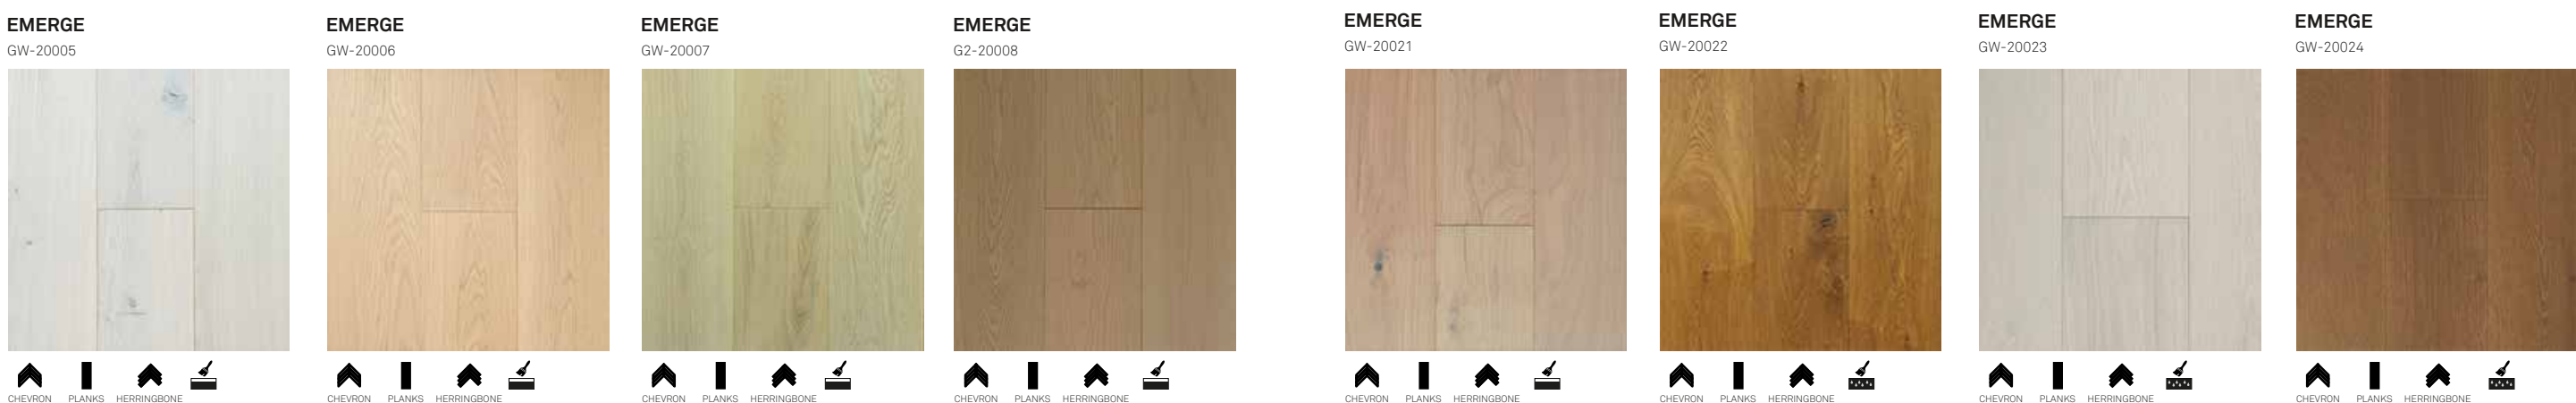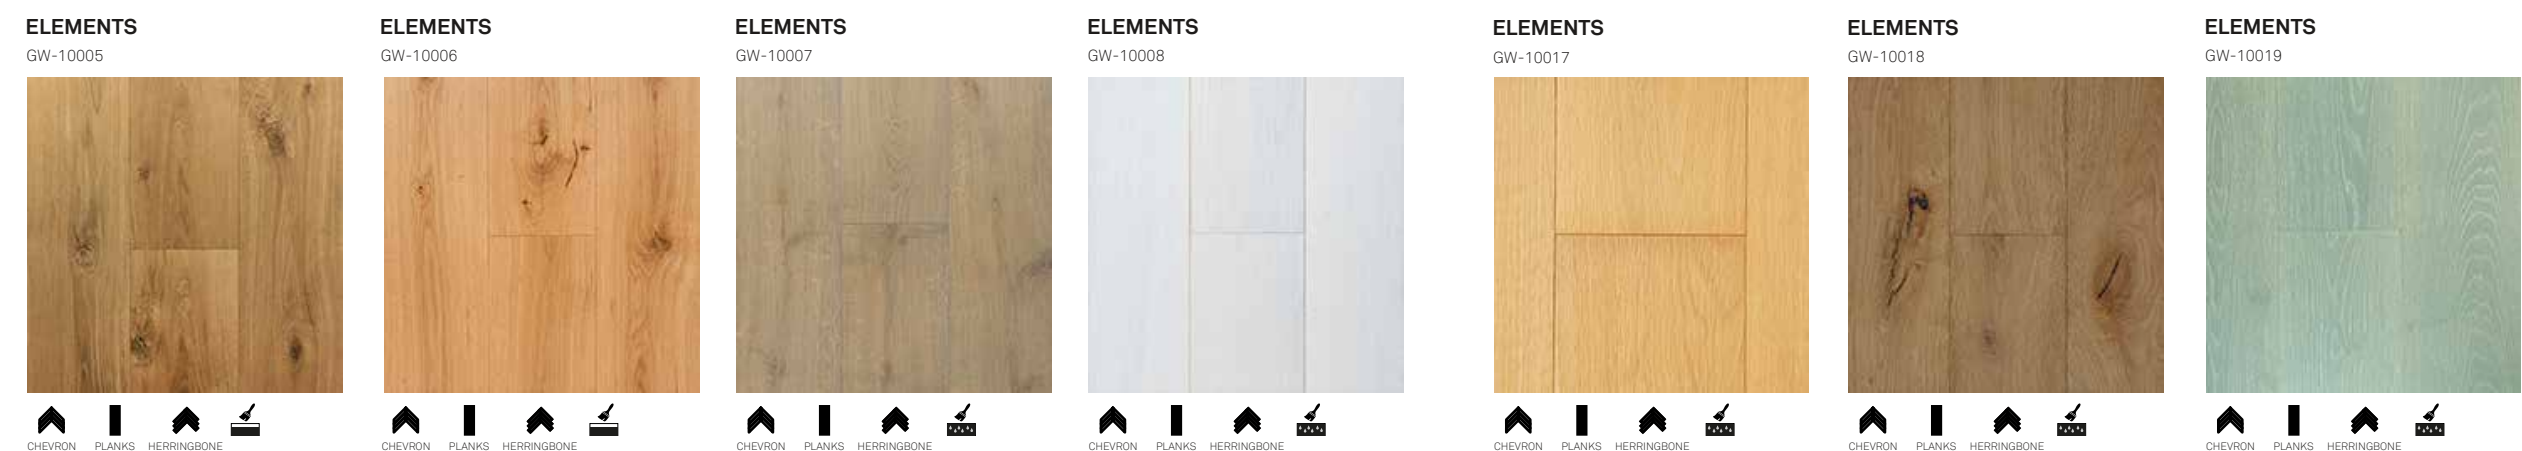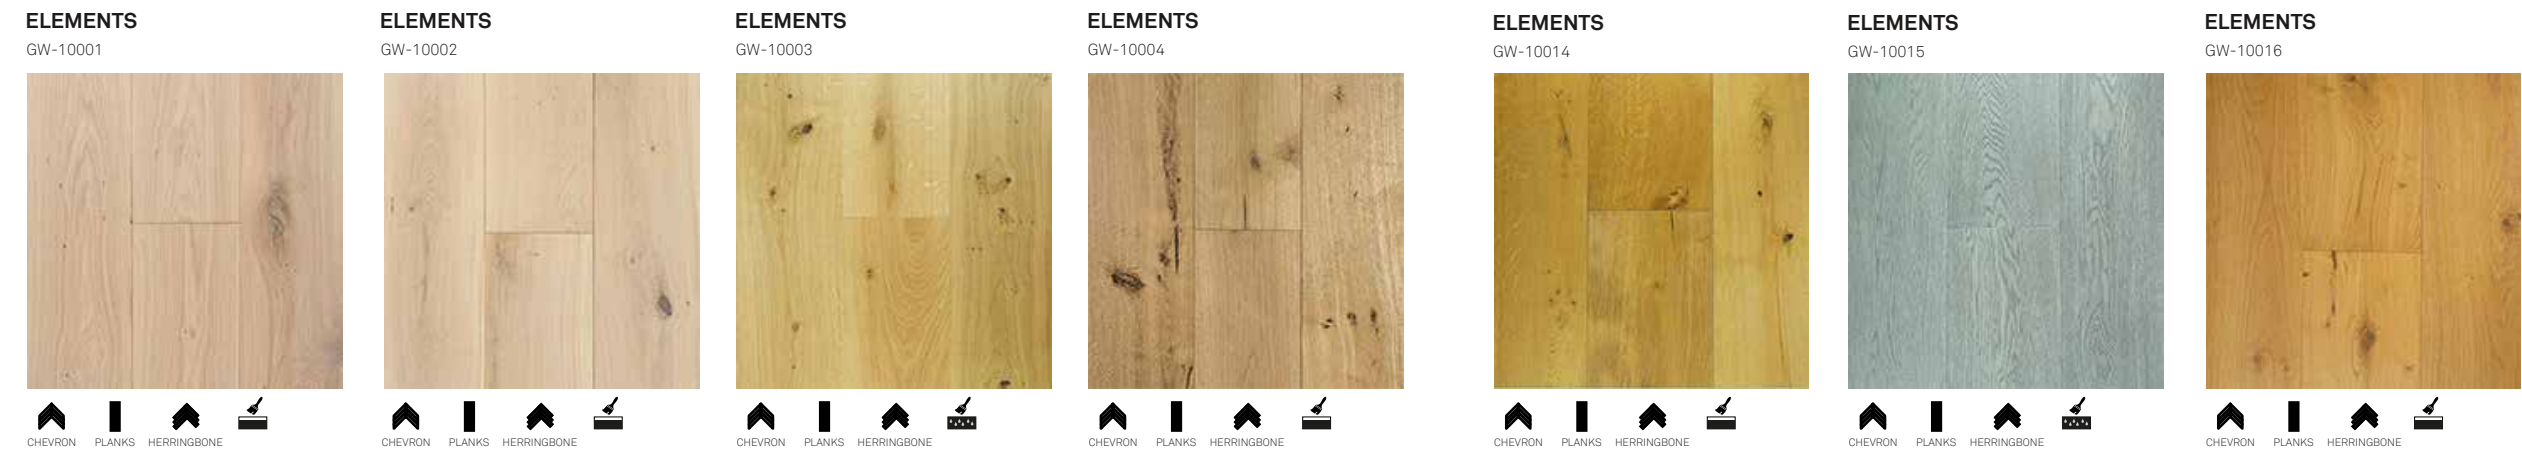





## MEET RUSTIC OAK COLLECTION

<b>CREATE</b> GW-40001	<b>CREATE</b> GW-40002	<b>CREATE</b> GW-40003	<b>CREATE</b> GW-40004

<b>SILENCE</b> GW-30007	<b>SILENCE</b> GW-30008	<b>SILENCE</b> GW-30009	<b>SILENCE</b> GW-30010

<b>CREATE</b> GW-40005	<b>CREATE</b> GW-40006	<b>CREATE</b> GW-40007	<b>CREATE</b> GW-40008

<b>SILENCE</b> GW-30011	<b>SILENCE</b> GW-30012	<b>SILENCE</b> GW-30013	<b>SILENCE</b> GW-30014

<b>CREATE</b> GW-40009	<b>CREATE</b> GW-40010	<b>SILENCE</b> GW-30001	<b>SILENCE</b> GW-30002

<b>SILENCE</b> GW-30015	<b>SILENCE</b> GW-30016	<b>SILENCE</b> GW-30017	<b>SILENCE</b> GW-30018

<b>SILENCE</b> GW-30003	<b>SILENCE</b> GW-30004	<b>SILENCE</b> GW-30005	<b>SILENCE</b> GW-30006

<b>SILENCE</b> GW-30019	<b>SILENCE</b> GW-30020	<b>SILENCE</b> GW-30021	<b>SILENCE</b> GW-30022

## MEET WALNUT & TEAK & ASH COLLECTIONS

<b>WALNUT</b> GW-80001	<b>WALNUT</b> GW-80002	<b>WALNUT</b> GW-80003

<b>WALNUT</b> GW-80004	<b>WALNUT</b> GW-80005	<b>ASH</b> GW-70001	<b>ASH</b> GW-70002

<b>ASH</b> GW-70003	<b>ASH</b> GW-70004	<b>ASH</b> GW-70005	<b>ASH</b> GW-70006

<b>TEAK</b> GW-60001	<b>TEAK</b> GW-60002	<b>TEAK</b> GW-60003	<b>TEAK</b> GW-60004

## MEET ARTISAN COLLECTION

<b>ARTISAN</b> GW-50001	<b>ARTISAN</b> GW-50002	<b>ARTISAN</b> GW-50003	<b>ARTISAN</b> GW-50004

<b>ARTISAN</b> GW-50005	<b>ARTISAN</b> GW-50006	<b>ARTISAN</b> GW-50007	<b>ARTISAN</b> GW-50008

<b>ARTISAN</b> GW-50009	<b>ARTISAN</b> GW-50010







**For more information,  
please reach out to**

Sales Support

[sales@golinkfloor.com](mailto:sales@golinkfloor.com)

+86 158 5729 0101

[info@golinkwood.com](mailto:info@golinkwood.com)

+86 198 8317 9548

**GOLINKFLOOR™**

No.238 Beihu Street, Deqing, Huzhou City, China  
[golinkfloor.com](http://golinkfloor.com) | [sales@golinkfloor.com](mailto:sales@golinkfloor.com) | [@golinkwood](https://www.instagram.com/golinkwood)